

Manuscript Number: FOOD-D-18-00850

Title: Single and combined pre-treatments effects on zucchini (*Cucurbita pepo* L.) squash microbial load reduction

Article Type: Full Length Article

Keywords: zucchini (*Cucurbita pepo* L.); *Enterococcus faecalis*; *Deinococcus radiodurans*; microbial Load Reduction; Blanching; continuous and pulsed UV-C radiation; thermosonication

Corresponding Author: Professor Margarida C. Vieira, Ph.D.

Corresponding Author's Institution: Instituto Superior de Engenharia and MeditBio, Universidade do Algarve

First Author: Filipa G Neves, Bachelor

Order of Authors: Filipa G Neves, Bachelor; Cristina L Silva, PhD; Margarida C. Vieira, Ph.D.

Abstract: Freezing vegetables requires pre-treatments to reduce microbial load and destroy enzymes that impair the frozen product quality. So far blanching has been the most effective pre-treatment, preferred by the food industry, despite its severity: heating up to temperatures close to 100 °C for 1-3 minutes causes sensory and texture changes in most horticultural products. Alternative blanching treatments, using UV-C radiation combined with milder thermal treatments or with thermosonication, may improve the quality of the final frozen vegetables. Zucchini (*Cucurbita pepo* L.), the vegetable under study, has an availability in fresh restricted to a season, needing therefore to be often frozen to be used throughout the year. In this study, its surface was first inoculated with two vegetable contaminants, *Enterococcus faecalis* and *Deinococcus radiodurans* cells, which are resistant, respectively, to high temperatures and to radiation and then submitted to several blanching treatments, single or combined and the effect on this microorganisms reduction was evaluated. As single treatments, water blanching (the control treatment, as it is the blanching treatment traditionally used) was applied up to 180 sec at temperatures ranging from 65 to 90 °C and UV-irradiation, applied in continuous. As combined pre-treatments, water blanching combined with UV-C (continuous or in pulses) and thermosonication (20 kHz at 50% of power) combined with UV-C pulses was also studied. The continuous UV-C radiation incident irradiance was 11 W/m² up to 180 sec and the pulses at incident radiance of 67 W/m², lasting 3.5 sec each (25 pulses). Mathematical modeling of bacterial reduction data was carried out using the Bigelow, the Weibull and Weibull modified models and estimation of their respective kinetic parameters, proved that the latter models presented a better fit below 75 °C. The best results proved to be the combination of water blanching at temperatures as low as 85 °C during less than 2 minutes with 25 pulses of UV-C (incident irradiance of 67 W/m²) or thermosonication at 90 °C also combined with UV-C pulses both resulting in 3 log reductions of both microorganisms under study. These results proved to overcome what

industry is requiring so far (a 2 log microbial reduction in 3 minutes), hence minimizing quality changes of frozen zucchini.

Suggested Reviewers: Annemie H. Geeraerd PhD
Katholieke Universiteit Leuven (Belgium)
annemie.geeraerd@biw.kuleuven.be
Expert in non-log linear microbial activation models

Amaia Lasagabaster PhD
AZTI-Tecnalia, Food Research Division, Parque Tecnológico de Bizkaia,
Astondo bidea, Edificio 609, 48160 Derio, Bizkaia, Spain
alasa@azti.es
expert in pulsed light

Iñigo M de Marañón
ZTI-Tecnalia, Food Research Division, Parque Tecnológico de Bizkaia,
Astondo bidea, Edificio 609, 48160 Derio, Bizkaia, Spain
expert in pulsed light

Michela Maifreni PhD
University of Udine
michela.maifreni@uniud.it

L. Cocolin, DISAFA, Largo Braccini
Leonardo da Vinci 44, 10095, Grugli
Italy

Faro, 23rd of November 2018

Dear Dr. Cocolin

Please find enclosed the article entitled:

“Single and combined pre-treatments effects on zucchini (*Cucurbita pepo* L.) squash microbial load reduction”, by F.I.G. Neves, C.L.M. Silva and M.C. Vieira,
to be submitted for publication to the International Journal of Food Microbiology.

Looking forward to your answer,

Sincerely,

Margarida Vieira

Highlights

- Non log-linear bacterial inactivation kinetics is observed when applying UV-C continuous waves or pulses combined with water blanching to Zucchini (*Cucurbita pepo* L.), inoculated skin with *E. faecalis* (ATCC 29212) and *D. radiodurans* (ATCC 13939)
- UV-C applied in pulses combined with water blanching enable less severe thermal pre-treatments of smooth skin vegetables such as Zucchini (*Cucurbita pepo* L.), to inactivate an enterobacteriaceae (*E. faecalis* ATCC 29212) and a radiation resistant microorganisms (*D. radiodurans* ATCC 13939).
- UV-C combined with Thermosonication is a combined treatment highly beneficial to inactivate radiation resistant microorganisms

1
2
3 **Combined pre-treatments effects on**
4 **zucchini (*Cucurbita pepo* L.) squash microbial load reduction**
5
6
7

8 **Filipa I.G. Neves ^a, Cristina L.M. Silva ^b, Margarida C. Vieira ^{a*}**
9
10
11

12 ***Submitted for publication to International Journal of Food Microbiology***
13
14

15 ^a MEDITbio –, Instituto Superior de Engenharia, Universidade do Algarve, Campus da
16 Penha, 8005-139 Faro, Portugal

17 ^{*} Corresponding author. Tel.: +351 289 800100

18 ^b CBQF – Centro de Biotecnologia e Química Fina – Laboratório Associado, Escola
19 Superior de Biotecnologia, Universidade Católica Portuguesa/Porto, Rua Arquitecto
20 Lobão Vital, Apartado 2511, 4202-401 Porto, Portugal

21 E-mail addresses: fgneves@ualg.pt (F.I.G. Neves), mvieira@ualg.pt (M.C. Vieira),
22 clsilva@porto.ucp.pt (C.L.M. Silva)

24

25 **Abstract**

26 Freezing vegetables requires pre-treatments to reduce microbial load and destroy
27 enzymes that impair the frozen product quality. So far blanching has been the most
28 effective pre-treatment, preferred by the food industry, despite its severity: heating up to
29 temperatures close to 100 °C for 1-3 minutes causes sensory and texture changes in most
30 horticultural products. Alternative blanching treatments, using UV-C radiation combined
31 with milder thermal treatments or with thermosonication, may improve the quality of the
32 final frozen vegetables. Zucchini (*Cucurbita pepo* L.), the vegetable under study, has an
33 availability in fresh restricted to a season, needing therefore to be often frozen to be used
34 throughout the year. In this study, its surface was first inoculated with two vegetable
35 contaminants, *Enterococcus faecalis* and *Deinococcus radiodurans* cells, which are
36 resistant, respectively, to high temperatures and to radiation and then submitted to several
37 blanching treatments, single or combined and the effect on this microorganisms reduction
38 was evaluated. As single treatments, water blanching (the control treatment, as it is the
39 blanching treatment traditionally used) was applied up to 180 sec at temperatures ranging
40 from 65 to 90 °C and UV-irradiation, applied in continuous. As combined pre-treatments,
41 water blanching combined with UV-C (continuous or in pulses) and thermosonication (20
42 kHz at 50% of power) combined with UV-C pulses was also studied. The continuous
43 UV-C radiation incident irradiance was 11 W/m² up to 180 sec and the pulses at incident
44 radiance of 67 W/m², lasting 3.5 sec each (25 pulses). Mathematical modeling of
45 bacterial reduction data was carried out using the Bigelow, the Weibull and Weibull
46 modified models and estimation of their respective kinetic parameters, proved that the
47 latter models presented a better fit below 75 °C. The best results proved to be the
48 combination of water blanching at temperatures as low as 85 °C during less than 2

minutes with 25 pulses of UV-C (incident irradiance of 67 W/m²) or thermosonication at 90 °C also combined with UV-C pulses both resulting in 3 log reductions of both microorganisms under study. These results proved to overcome what industry is requiring so far (a 2 log microbial reduction in 3 minutes), hence minimizing quality changes of frozen zucchini.

Keywords: Zucchini (*Cucurbita pepo* L.); *Enterococcus faecalis*; *Deinococcus radiodurans*; Microbial Load Reduction; Blanching; Continuous and Discontinuous UV-C Radiation.

74

75 **1. Introduction**

76 Fresh fruits and vegetables have both important nutritional and economic value. Recently,
77 consumers started revealing an increasing interest in the relationship between their health
78 and the nutritional aspects of food, namely of horticultural products (vitamins content,
79 mineral elements, antioxidants, etc.) (Scalzo et al., 2005). Zucchini (*Cucurbita pepo* L.) is
80 a small summer marrow or green squash, with a shape resembling a ridged cucumber. It
81 is usually available in fresh, being consumed raw with skin in salads, or served cooked in
82 soups or other recipes. With the growing use of frozen foods, which besides retaining
83 most of the nutritional quality of their fresh produce have a long shelf life becoming
84 available in all seasons, commercial frozen chopped zucchini has become more popular
85 (Gebczynski and Kmiecik, 2007). Industrial production of frozen vegetables involves a
86 thermal pre-treatment named blanching, before blast-freezing, to reduce microbial load
87 (as horticultural products normally grow in contact with soil, which is a considerable
88 microbial contamination source) and to inactivate enzymes (Neves et al., 2012)
89 responsible for unwanted sensory changes during frozen storage (Brewer et al., 1995).
90 Water or steam blanching is a thermal pre-treatment commonly applied to vegetables
91 (Canet, 1989) prior to freezing, canning or drying using temperatures ranging from 70 to
92 100°C lasting from seconds to a few minutes. It has several also secondary benefits, due
93 to its washing action, such as elimination of off-flavors possibly formed since harvesting
94 and until processing and/or removal of any residual pesticides (Canet, 1989;
95 Kleinschmidt, 1971; Préstamo et al., 1998; Shams and Thompson, 1987). Nevertheless,
96 the severity of this process should be reduce as it imparts pigment modifications, tissue
97 softening or nutrient losses, impairing quality (Aguilar et al., 2004; Goodman et al., 2002;

Hoover, 1997). Moreover, from an industrial point of view, this process may be extremely energy consuming.

In an attempt to respond to this problem, the sought for novel non-thermal processes to produce high-quality foods is underway. There is a growing interest in the use of ultraviolet (UV) radiation for disinfection of air, control of contamination on the surface of plant and packaging materials or in post-harvest storage of fruits and vegetables (Allende and Artés, 2003; Martens and Knorr, 1992;). UV light is classified by wavelength as UV-A (320–400 nm), UV-B (280–320 nm), UV-C (200–280 nm) and UV-V (100–200 nm) (Guerrero-Beltrán and Barbosa-Cánovas, 2004). Short wavelength (254 nm) UV-C light is considered to be germicidal, and its effect thought to be due to the penetration on the outer cell membrane, damaging the deoxyribonucleic acid (DNA) by causing formation of pyrimidine dimers, cross-links, strand breaks and base modification such as alkylation and oxidation (Britt, 1996, Tuteja et al., 2001; Tuteja and Tuteja, 2001). This effect prevents the microorganism's DNA to transcript and replicate, leading eventually to cell death (Bank et al., 1990; Bintsis et al., 2000; Miller et al., 1999). UV radiation in the range of 250–260 nm is lethal to most microorganisms, including fungi, yeast, bacteria, viruses, protozoa, and algae, which is the main reason why this technique has been studied as a food disinfectant agent (Allende and Artés, 2003; Bintsis et al., 2000; Lopez-Malo and Palou, 2005). An ultraviolet treatment does not produce by-products or generate chemical residues that could change the sensory characteristics of the final product (Guerrero-Beltrán and Barbosa-Cánovas, 2004). It does not deliver residual radioactivity as ionizing radiation and it is a cold and dry process requiring very low maintenance (Morgan, 1990). However, this kind of light is limited to applications on surfaces or to transparent liquids due to its low penetrating capacity being also limited to low-fat products due to its ability to catalyze oxidative changes. Due to the wide

variety of organisms present on food surfaces, the most critical factor is the required radiation dose (fluence) commonly measured in J/m^2 and depending on the distance from the UV source to the product and on the exposure time. Low fluencies may not be effective, whereas high fluencies, although greatly reducing the number of microorganisms, may produce discoloration and accelerate the senescence of the product. In some cases, to achieve a sufficient decrease in pathogen populations it will require several minutes, which renders this technique unfeasible for certain industrial applications (Maharai, 1995; Marquenie et al., 2002). UV-C irradiation may also be applied as pulses using high voltage electricity discharges for very short periods of time (seconds) after thermal processing. This technique appears recurrently in literature reviews as “having potential for future use” or “imminent commercial applications” (Dunn, 2001; Morris et al., 2007).

Another non-thermal technology that is deserving a lot of attention is the application of ultrasounds, a low frequency (20000 Hz or 20 kHz) and high power (typically in the range $10\text{-}1000 \text{ W/cm}^2$) energy generated by sound waves. When the power is high, the rarefaction amplitude of the sound waves may exceed the attractive forces of the liquid molecules, which create cavitation bubbles from gas nuclei existing within the fluid. These bubbles, spread in the liquid, grow very fast to a critical size, becoming unstable and violently collapsing (Barbosa-Cánovas and Rodríguez, 2002; Mason, 1998; Shukla, 1992) leading to energy accumulations in extremely high temperature ($\sim 5000 \text{ K}$) and pressure ($\sim 1000 \text{ atm}$) spots that cause very high shear energy waves and turbulence in the cavitation zone (Suslick, 1998; Wu, 2002). Ultrasound can be used alone (sonication) or combined with different processing treatments in order to increase their process efficiency and reduce the process severity by lowering the temperature (Señorans et al.,

2003). Ultrasonication may be applied in water at temperatures in the range of water blanching being then commonly referred to as TS-thermosonication (Cruz et al., 2013). *Enterococcus faecalis*, is a regular vegetable contaminant that grows and spoils vegetables very quickly, at environmental temperatures. Due to its high resistance to freezing or pasteurization temperatures for long periods of time (Adams and Moss, 1995; Hartman et al., 1992; Perez et al., 1982; Ray, 1996; Temiz, 1998;) it can be a good indicator of the efficiency of thermal and non-thermal treatments. *Deinococcus radiodurans* that resists to extreme conditions of life, such as excessive desiccation and exposures to high fluencies of ionizing and ultraviolet radiation, as well as many toxic chemicals (Battista, 1997; Blasius et al., 2005; Minton, 1996; Sommer and Hubscher, 2008). This bacterium can mend over 100 double-strand breaks of genomic DNA (DSBs) - the most severe form of chromosomal damage, whereas most vegetative prokaryotic and eukaryotic cells can survive only to less than a dozen simultaneous DSBs (Battista, 1997; Kitayama and Matsuyama, 1971). Remarkably, the reassembly of these fragments into functional chromosomes is quite fast due to an efficient and precise DNA repair process (Minton, 1994; Repar et al., 2010). This microorganism can be a good indicator to test the efficiency of UV-C irradiated food when assuming that resistant microorganisms to radiation are present.

This study was intended to develop a milder blanching treatment, when compared to the traditional water blanching to apply to zucchini by replacing this treatment totally or just partially, by combining it (at lower temperatures and shorter times if possible) with UV-C radiation combined and/or with thermosonication. Two microorganisms were used to test the efficiency of all the treatments studied, *Enterococcus faecalis*, and *Deinococcus radiodurans* for the reasons described above.

2. Materials and Methods

2.1. Inoculums Preparation

The strains of *Enterococcus faecalis* (ATCC 29212) and *Deinococcus radiodurans* (ATCC 13939) used in this study were acquired from the American Type Cultures Collection (ATCC) as a lyophilized pellet in a stick device (kwik-stikTM). To prepare the inoculum, the procedure used was the same for both microorganisms. Pellets of each strain, were first rehydrated and mixed with the fluid present in the device. Both primary cultures were inoculated by means of a swab in Petri dishes with Plate Count Agar (PCA) (Scharlou, Scharlab S.A., Spain), and incubated at 37 °C during 24 h. Next, a loop of growing cells taken from the inoculated area of each strain, was re-streaked in another PCA plate and incubated for more 24 h. To obtain stationary growing phases, a loop of growing cells taken from the inoculated area of each strain, was then, for *E. faecalis* ATCC 29212, submerged in 250 mL of Brain and Heart Infusion (BHI) (Scharlou) at 44 °C during 15 h and, for *D. radiodurans* ATCC 13939, placed in a Nutritive Broth (Scharlou) at 37 °C during 24 h. Next, 10 mL of the initial inoculum was added to 2 L of sterilized water, giving a microbial load of approximately 10^4 viable microorganisms.

2.2. Raw Material

Zucchini (*Cucurbita pepo* L.) squashes (15-20 cm length and 5-6 cm diameter) were obtained in a local supermarket, in Faro - Portugal. All vegetables were carefully selected, free of disease symptoms and defects, with uniform size and color. From each vegetable, the edges were first discarded and the obtained cylinders were manually cut lengthwise in four parts with a stainless steel knife hereinafter called quarters.

2.3. Chemical Disinfection

The zucchini (*Cucurbita pepo* L.) quarters were immersed in a bath containing 2 L of distilled and sterilized water in a 5 % solution of sodium hypochlorite, which is

recognized as GRAS (generally recognized as safe) (prepared from a commercial brand – W5), with constant mixing during a contact time of 10 minutes. Afterward, the samples were rinsed in distilled sterile water to remove the chemical residues and then dried on open air.

2.4. Sample Inoculation

Right after disinfection, zucchini pieces were immersed for 10 minutes in the single inoculum-broth, prepared as described above, and next were let dry in open air.

2.5. UV-C Radiation Equipment

The source of UV-C radiation was a set of 4 separated and unfiltered 16 W TUV (Philips) germicidal lamps mounted in the top part of a chamber at a distance of 10 cm from the sample holder. This equipment was designed at the Food Engineering Department of University of Algarve, Portugal. In order to maximize the intensity of the incident radiation, a preliminary study with the help of a digital photometer (DO 9721 Delta OHM, Caselle di Selvazzano, Italy) was carried out to find the spot on the plate where this radiation would be maximum. During this study, a ventilation device was installed in the back of the chamber to avoid temperature increase. Right after switching on the device, the radiation intensity reached a peak, followed by a decrease of intensity levelling into a plateau (stabilization) after \approx 10 minutes.

2.6. Enumeration

The germicide effect of UV-C radiation was only evaluated on the whole vegetable surface with and without any kind of chemical disinfection.

Ten g of tissue from the quarters' peel were aseptically removed with a sterile scalpel and pummeled in a stomacher (Seward, Stomacher 400), using 90 mL of BPW for 3 minutes.

Appropriate decimal dilutions in Buffered Peptone Water (BPW) (Scharlou) were performed. All microorganisms was enumerated in duplicate.

2.6.1. *Enterococcus faecalis* ATCC 29212 bacteria

These bacteria were grown at 44 °C for 48h in Slanetz and Bartley Agar (Scharlou). The colonies presented a wine-red color.

2.6.2. *Deinococcus radiodurans* ATCC 13939 bacteria

These bacteria were incubated in PCA (Scharlou) enriched with 1 % of D-Glucose Anhydrous (Merck) at 37 °C during 24 h. The colonies were white. All the procedure was carried out using a Microflow Security Cabinet (Bioquell, Germany) in order to prevent post-contamination.

2.7. Pre-treatments applied to zucchini

In all the pre-treatments studied, zucchini was first inoculated with the microorganism in study (either *E. faecalis* or *D. radiodurans*) according to the procedure described in 2.4. As a control, zucchini quarters, disinfected and inoculated, but without any application of pre-treatment, were used in all the experiments described. Inoculation levels were in the range of $3 \times 10^4 \pm 1 \times 10^4$ considered the level of contamination found in nature. Due to this variation in counts for each inoculation, it was decided that bacteria enumeration should always be evaluated in a relative way. Therefore, in each experiment the initial microbial count was determined and each count after the thermal treatment (N) was divided by the initial count (N_0) in order to obtain relative degradations.

2.7.1. Single pre-treatments

As single pre-treatments, hot water immersion (used as control treatment) and two kinds of UV-C treatments (1. continuous incident irradiance for 1.5min at 11 J/m² and 2. discontinuous fluence of radiation for 25 pulses at 67 W/m² incident irradiance) were carried out. The temperature inside the equipment was monitored with a thermocouple (constantan-type T, 1.2 mm diameter) and mean temperature during the treatments was 25 ± 2 °C. The fluent radiation was monitored by the UV digital photometer (DO 9721 Delta OHM, Caselle di Selvazzano, Italy). Safety goggles and protective gloves were also used. All experiments were run in triplicate.

2.7.1.1. Continuous fluence UV-C radiation treatments on zucchini

Prior to use as a continuous source of radiation, the UV-C lamps were allowed to stabilize by waiting 10 minutes after switching on the lamps until a plateau was reached of 11 W/m² (Fig. 1a). After that, the door was opened, a sample was placed quickly in the sample holder, and the door was shut right away. Irradiation times varied from 15 up to 180 sec (fluences ranging from 165 up to 1980 J/m²).

2.7.1.2. Discontinuous fluence (pulses) of UV-C radiation treatments on zucchini

The idea of applying pulses came from the observation that the lamps emitted right after being turned on a much higher intensity of radiation (peak) of 67 W/m² (Fig. 1a). Pulses could therefore be produced, by turning the switch on and off every 3.5 seconds (Fig. 1b). Each pulse being equivalent to 3.5 sec of irradiation time. The pulses applied varied from 5 pulses (equivalent to 17.5 sec, fluence -1172.5 J/m²) up to 35 pulses (122.5 sec, fluence - 8207 J/m²).

2.7.1.3 Thermal Treatment (Water Blanching)

Zucchini quarters were immersed in a thermostatic water bath (Grant, model W14, Cambridge, England), with 10 L capacity, at six different temperatures in the range of 65 °C to 90 °C. Samples were taken out from the water bath after the required processing times, ranging from 10 to 180 seconds, and immediately cooled down in an ice water bath. The water bath temperature was monitored with a digital thermometer (Ellab ctd 87) and a thermocouple (type T, 1.2 mm diameter).

2.7.2 Combined UV-C Treatments with Thermal Treatment (Blanching)

A combined UV-C radiation/thermal treatment was next studied. As the effect difference of the sequence, UV-C application before blanching irradiation or blanching before UV-C irradiation was unknown, a preliminary experiment was run at temperatures of 60 and 90 °C to test the microbial reduction of *E. faecalis* with both sequences leading to the conclusion that UV-C radiation should be first applied. Hence, contaminated zucchini (*Cucurbita pepo* L.) quarters, were first exposed to a continuous fluence of UV-C radiation or to UV-C pulses, as described above, followed by being subjected to the same thermal treatment described in 2.7.1.3. Right before the radiation treatment, three quarters were collected for microorganisms' enumeration to evaluate the initial microbial load.

2.7.3. Discontinuous fluence of UV-C radiation combined with thermosonication

A combined UV-C pulsed radiation/ with thermosonication applied to Zucchini (*Cucurbita pepo* L.) quarters for the same range of temperatures was the last treatment applied. The procedure followed was the same as in 2.7.3 except for the thermal treatment that was replaced by thermosonication. The water bath where samples were immersed had now coupled an ultrasound horn (Cole Parmer V1A; 13 mm dia) at 20 kHz and an ultrasound generator (Cole-Parmer 4710 Series) radiating 50% of power.

2.8. Data Analysis

2.8.1. Modeling of the inactivation behavior

Survival curves for both *E. faecalis* and *D. radiodurans* were generated from the experimental data by plotting $\log N/N_0$ (where N is the number of colony-forming units CFU/mL at a given time, and N_0 the initial number of CFU/mL) *versus* time of blanching. To describe the behavior of the two microorganisms, three mathematical models were attempted, the Bigelow model, the Weibull model and by a modified version of the latter as described below and showed in Table 1.

2.8.1.1. Bigelow Model

The Bigelow model, being a conventional first-order model, is based on the assumption that the microbial populations, have a homogeneous resistance to heat, being in equation 1 N_0 the initial and N the final (at t time of exposure) microbial populations in c.f.u./ml and N/N_0 the survivors fraction,

$$\log\left(\frac{N}{N_0}\right) = -\frac{t}{D_{(T)}} \quad (1)$$

The temperature dependence of the decimal reduction time $D_{(T)}$ may be described by the Bigelow model (1920) eq. 2 (Purich and Allison, 2000):

$$D_{(T)} = D_{(T_{ref})} 10^{\left(\frac{T_{ref}-T}{z}\right)} \quad (2)$$

Where z represents the temperature increase to produce one decimal reduction in $D_{(T)}$ (°C) and T_{ref} the average of experimental temperatures (K).

2.8.1.2. Weibull-Peleg model

The Weibull model (eq. 3), on the other hand, considers that the heat resistance of a microbial population may vary, mainly due to its growth phase, being able to model with a good fit the inactivation of microorganisms by several factors, such as heat or radiation (Fernández et al., 1999; Peleg, 1999; Peleg and Cole, 1998, 2000).

$$\log\left(\frac{N}{N_0}\right) = -k_T t^p \quad (3)$$

It introduces a parameter p (the time power) the “shape parameter” related to the survival curve shape and independent from temperature. The value of p indicates whether the surviving microbial cells have the ability to adapt to the applied stress ($p < 1$, curve upper concavity in tail shape) or are in a very injured condition ($p > 1$, downward concavity in shoulder shape). When $p = 1$, a linear behavior is observed, meaning that the system follows the Bigelow model (eq. 2) (Albert and Mafart, 2005). $k_{(T)}$ on the other hand is temperature dependent. Regarding this dependence, several models can describe it, being the most well known the Arrhenius model (eq. 4), which considers that all processes causing death of microbiota in their vegetative or spore form are defined by a single activation energy E_a (J/mol), implying that all present microorganisms have the same

$$k = k_{ref} \exp\left(-\frac{E_a}{R}\left(\frac{1}{T} - \frac{1}{T_{ref}}\right)\right) \quad (4)$$

resistance to the applied process.

Where:

R - is the Universal gas constant (8.31 J/molK)

T - Temperature of the isothermal experiment (K)

k_{ref} - Value of k at the reference temperature T_{ref}

However, there are other models that take into account different resistances to thermal inactivation like the log logistic model (eq. 5), recommended for microbial inactivation by several authors (Corradini et al., 2005; Peleg et al., 2002; Peleg, 2003a;),

$$k_{(T)} = \ln \{1 + \exp[k_0(T - T_c)]\} \quad (5)$$

Where T_c , the critical temperature marks the temperature at which destruction starts to accelerate and k_0 is the slope of the linear part of the $k_{(T)}$ curve, at temperatures much higher than T_c .

2.8.1.3. The Weibull-Mafart model

A modification of the Weibull model, (Mafart et al., 2002) was also tried, where a new parameter was introduced (δ) which represents the time needed for the first decimal reduction cycle on the microbial population to take place and is related to the constant rate as shown in Eq. 6.

$$\log\left(\frac{N}{N_0}\right) = -\left(\frac{t}{\delta}\right)^p \quad (6)$$

Parameter δ and the constant rate (k) are related, as shown in eq. 7 and depends on

$$\delta_{(T)} = \left(\frac{1}{k_{(T)}^{1/p}}\right) \quad (7)$$

temperature in a similar way as parameter D in the Bigelow model (eq. 8).

353

354 To model the experimental data, the models shown in Table 1 were used, where

$$\hat{\partial}_{(T)} = \hat{\partial}_{(T_{ref})} 10^{\left(\frac{T_{(ref)} - T}{z}\right)} \quad (8)$$

355 parameters $D_{(T)}$ of Eq. 1, $k_{(T)}$ of Eq. 3 and $\delta_{(T)}$ of Eq. 5 were replaced by the equations

356 that better describe their temperature dependency (Eq. 2, Eq. 4 and Eq. 6, respectively).

357 The kinetic parameters were estimated for each model directly from the experimental

358 data, by performing a non-linear regression analysis (Arabshahi and Lund, 1985). The

359 reference temperature used was the average value of the range considered, aiming at

360 improving the parameter estimation.

361

362 2.8.2. Statistical Analysis

363

364 To allow the selection of the best model, internal validation was carried out through the

365 precision of the estimated parameters for all models studied, evaluating the confidence

366 intervals at 95%. Also quality of regressions was assessed by the coefficient of

367 determination through the evaluation of the adjusted coefficient of determination ($R^2_{adj.}$),

368 p-value, standard deviation and randomness and normality of residuals (Hill and Grieger-

369 Block, 1980). To carry out all the statistical analysis the Statistical Software STATA

370 version 10.0 was used (Statacorp, 2007).

371

372 3. Results and Discussion

373 3.1 Single treatments applied

374 In Fig. 3, first two columns, *a* (*E. faecalis*) and *b* (*D. radiodurans*) under WB, the

375 standardized survivor counts (N/N_0) are shown for both microorganisms in a 3-log cycle

scale, for all the tested temperatures and up to 3 min. At 65 °C, very little effect is observed in both microorganisms reduction. At 70 and 75 °C, by 3 min, the number of survivors of *E. faecalis* reached a non-detectable level, leading to the conclusion that a 3 log₁₀ reduction was achieved by this time and assuming a Bigelow temperature dependence above this temperature it would be expected to obtain the same reduction in shorter processing times. However, at 80 and 85 °C, a deviation from log-linear behavior was observed as some bacteria were detected by 3 min (pointed in red in Fig. 3) contradicting the previous results. As for *D. radiodurans* up to 80 °C less than a 1 log₁₀ reduction was achieved after 3 min, and for higher temperatures only a 2 log₁₀ reduction was achieved by the same time. Again, a deviation from a log-linear behavior is observed, enhanced with an increase in temperature.

Concerning the effect of single UV-C radiation treatments on both microorganisms, when applied continuously (11 J/m²), UV-C irradiation does not cause much effect on *E. faecalis* reduction and even when applied in pulses of 67 J/m² each, only a 1 log₁₀ reduction was obtained as observed in (Fig. 2 a). This result is agreement with the reported 1 log₁₀ reduction on *Enterococcus faecalis* ATCC 29212 by Gayán et al., 2014 (66 J/m² for a 1 log₁₀ reduction). Manzocco et al. (2011) achieved reductions in the range of 2.14-2.32 log CFU/g for enterobacteriaceae while cutting melon under UV-C light at different fluences (1.2, 6000 and 12000 J/m²) up and times (1, 5, and 10 min) proving that shorter periods of PUV exposure are more effective than UV-C. As for *D. radiodurans* (Fig. 2 b) a continuous UV-C treatment (11 J/m²) for 90 secs did not have any significant effect on this resistant microorganism. The behavior of *D. radiodurans* to radiation is not surprising, as *D. radiodurans* is very resistant to UV-C radiation, the reason why it was used in this study. In the Gayán et al, 2014 study, it was published for this strain under the designation *Micrococcus radiodurans* ATCC 13939, that for a 1

log₁₀ reduction a fluence of 198.6 J/m² is needed. It is known that the mechanism of microbial inactivation caused by UV-C radiation occurs because of protein structure modifications other than those derived from conventional thermal blanching (Daly et al., 2007; Daly, 2012). Resistance to microbial inactivation is therefore due to its ability to produce protein protection mechanisms such as powerful antioxidants (Battista, 1997; Blasius et al., 2008; Cox and Battista, 2005; Minton, 1996).

The nature and composition of food surface, the degree of attachment to or association of microorganisms with food and biofilms formation are other possible justifications (Mohamed and Huang, 2007).

3.2 Combined treatments applied

When combining UV-C (continuous or pulsed) with blanching treatments, the sequence UV-C irradiation followed by blanching, proved to be significantly more effective in reducing *E. faecalis* than the other way around, at both 60 and 90 °C, (Fig. 4, *a* and *b*), being the effect much more noticeable at the lower temperature. In fact, when WB is applied first, water droplets stay on top of the zucchini skin causing a shield to UV-C radiation to penetration on the area covered by the droplet and a shadow effect.

By observing Fig 3 again, the application of UV-C in continuous followed by water blanching (UV-C + WB) hardly any improvement is observed when compared to single WB until 80 °C is reached. For higher temperatures, 85 and 90 °C, benefits are more noticeable for both *E. faecalis* (3 log₁₀ reductions in less than 30 sec) and *D. radiodurans*. For the latter microorganism only a 1 log₁₀ reduction is obtained for temperatures below 80 °C after 3 min WB, 2 log₁₀ reduction at 80 and 85 °C for the same water blanching time and 2 log₁₀ reduction by 2 min WB when at 90 °C. The beneficial effect of the combination of UV-C P + WB on *E. faecalis* reduction can be seen in fig 3, for all temperatures below 80 °C (around 1 more log₁₀ reduction for all temperatures). However,

the beneficial effect on the reduction of *D. radiodurans* is clear when compared to WB or UV-C + WB, being possible to obtain a 3 log₁₀ reduction above 85 °C by 2 min. To date, several mechanisms have been proposed to explain pulsed UV-C light lethal effect, all of them related to the UV part of the spectrum and its photochemical effect (Elmnasser et al., 2007; Wang et al., 2005;). Lasagabaster and Marañón in 2014, claimed that pulsed light causes sublethal damage turning bacteria cells more sensitive to the post inflicted stress such as blanching. McDonald et al. (2000) obtained similar results with *Bacillus subtilis* spores in aqueous solutions and surfaces, with pulsed UV-light the inactivation was significantly higher than continuous wave UV light. Since the intense UV-C pulses decontamination effect seems to depend on the light absorption by microorganisms, certain food could also absorb the effective wavelengths and decrease the efficacy of this treatment. Nevertheless, detailing the UV-C pulses conditions using other parameters such as pulse frequency, pulse width and polarity may help in determining the efficiency of the treatment (Aguiló-Aguayo et al., 2008; Mosqueda-Melgar et al., 2008a, 2008b, 2008c).

When replacing blanching by thermosonication combined with UV-C Pulses (UV-C P + TS) results for *E. faecalis* were not improved becoming worse as WB temperatures increase suggesting an antagonistic effect of ultrasounds when combined with water blanching. However, notorious benefits can be seen on *D. radiodurans* for all temperatures due most probably to mechanical effect of ultrasounds induced by the formation of pressure gradients during the collapse of cavitation bubbles within or near the bacteria caused some destruction on the protecting protein on the cell membrane leaving them less resistant (Cruz et al., 2013).

3.3 Mathematical modeling

3.3.1 Bigelow model

In an attempt to model mathematically the data presented, the first model used was the Bigelow model. Table 1 presents the estimated kinetic parameters for this model and Fig 5 presents the model curves obtained. On *E. faecalis* this model fitted well the experimental data for all treatments except UV-C + TS for all temperatures besides 65 °C where after the first 10 seconds some counts would decrease at a much slower rate than the ones predicted by this model. As for *D. radiodurans*, the deviation from the Bigelow model was observed for all treatments applied, besides UV-C + TS, and in the range of temperatures studied which confirms its resistance to heat and UV radiation. This behavior is in agreement with the statement of Geeraerd et al., 2005, that the log-linear model is not accurate in describing the behavior of most bacteria inactivation when undergoing both thermal and non-thermal processes. The existence of more resistant bacteria in a population can be explained by an age dependence of the cells' resistance to temperature, being old cells more liable than the younger ones (White, 1953). In fact, bacteria heat tolerance may be related to the bacteria life cycle. In the stationary phase, cells are naturally more resistant to heat than in the exponential phase (Steels et al., 1994). Barbosa-Cánovas et al. (1999) reported that cell membrane properties might vary in the different growth stages leading to different heat resistance of bacteria. This behavior was probably the reason for the deviation on microbial reduction predicted by the Bigelow model and observed for both bacteria (Fig. 3 and 5).

In addition, *E. faecalis*, known to have the ability to form biofilms, may start to adhere (starting step in biofilm formation) to the zucchini surface during the drying time (around 4 hours), layer by layer and consequently the underneath layers will become less exposed

to the UV-C radiation and to heat transfer (Gómez-López et al, 2005a, Mohamed and Huang, 2007).

3.3.2 Using the Weibull-Peleg model

Figure 5 show that most semi-logarithmic survival curves were clearly nonlinear, being most of them concave and with a tailing effect. The higher T_c value was obtained for For both microorganisms, the p value was < 1 (Table 2). Therefore, following the interpretation of Albert and Mafart, 2005, the remaining cells though stressed are not very injured and may adapt to the new situation. Also, it can be noticed that p presents a higher value for the blanching treatment alone when compared with the combined treatments and though this difference is not significant at 0.05 % confidence level, it might indicate that the process might affect p , proving that this parameter is not only strain-dependent. These results confirm that a single p value evaluated from a set of survival kinetics is sufficient to describe the survival kinetics, but the effect of external factors such as irradiation with UV at a high fluence on bacterial heat resistance might change it.

3.3.3 Using the Weibull-Mafart model

By observing fig 5, it can be seen that the Weibull-Mafart model, though estimating other parameters, δ and z , (Table 3) presents almost the same the trend as the Weibull-Peleg model for both microorganisms. By observing Fig 6, the addition of UV-C radiation applied either continuously (UV-C) or in pulses (UV-C P) to the water blanching treatment did not affect the δ value of *E faecalis* (a) but when thermosonication was added this value increased significantly meaning that this treatment (UV-C P + TS) is not beneficial to decrease the temperature of the heat treatment. The additive effect of the ultrasound waves when added to heat is here antagonistic (Cruz et al., 2013). As for the z

-value, the opposite occurred, it only increased significantly at a 5% level for UV-C P + WB, meaning that *E. faecalis* lost sensitivity to temperature changes with this treatment. Regarding *D. radiodurans* (b) in Fig. 6, it can be seen that δ decreases significantly at 5 % level for UV-C P + WB and UV-C P + TS meaning that this microorganism became more heat labile with these two treatments, but the z-value remained unchanged meaning that this microorganism didn't increase its sensitivity significantly to temperature changes with any of the combined treatments. When zucchini was contaminated with *E. faecalis* and *D. radiodurans*, the combination of pulsed UV-C light and water blanching, proved to be, significantly more effective. Modeling of its reduction behavior allows prediction of the best conditions in new blanching processes by associating these two treatments with a lower temperature to achieve a 3 log reduction in microbial load in less than 2 minutes, minimizing sensory and quality changes.

4. Conclusion

These results confirm the hypothesis that short UV-C in high fluences (pulses of incident irradiance of 67 W/m²) combined with water blanching can be effective in preventing microbial deterioration in processed smooth surface vegetables by reducing the microbial population and thereby keeping the quality of products such as zucchini squash. Notably, these type of treatments, if efficient, can minimize the thermal impact of water blanching on vegetables to be frozen and obtain the same level of microbial reduction with a less severe heat treatment (lower temperature in a shorter time) applied due to the synergistic effect of the combined treatment of UV-C P at 67 W/m²+ WB.

Considering that a vegetable or fruit with a smooth skin might be contaminated by heat resistant enterobacteriaceae and high radiation resistant microorganisms, the results from this study will help to design better pre-treatment conditions, minimizing safety threats and maximizing the product quality. These results also proved to overcome what industry

is requiring so far (a 2 log microbial reduction in 3 minutes), hence minimizing quality changes of frozen zucchini.

Acknowledgments

The author Filipa I.G. Neves gratefully acknowledges her Ph.D. Grant SFRH/BD/19883/2004 to *Fundação para a Ciência e Tecnologia (FCT)* from *Ministério da Ciência e do Ensino Superior*.

All authors wish to thank the financial support through Programa Operacional para a Agricultura e o Desenvolvimento Rural - Project AGRO no. 822 (Novas Tecnologias de Processamento de Hortofrutícolas Congelados – EMERCON).

534 **References**

- 535 Adams, M.R., Moss, M.O., 1995. The Royal Society of Chemistry, Food Microbiology,
536 Cambridge, UK, pp 257-258.
- 537 Aguilar, C.N., Rodriguez-Herrera, R., Montanez-Saenz, J.C., Reyes-Veja, M.D.,
538 Contreras-Esquivel, J.C., 2004. Blanching at low temperatures: A thermal bioprocess
539 applied to fruits and vegetables to improve textural quality. Food Sci. Biotechnol, 13(1),
540 104-108.
- 541 Aguiló-Aguayo, I., Odriozola-Serrano, I., Quintão-Teixeira, L.J., Martín-Belloso, O.,
542 2008. Inactivation of tomato juice peroxidase by high-intensity pulsed electric fields as
543 affected by process conditions. Food Chem., 107, 949-955.
- 544 Albert, I., Mafart, P., 2005. A modified Weibull model for bacterial inactivation. Int. J.
545 Food Microbiol. 100 (1-3):197-211.
- 546 Allende, A., Artés, F., 2003. UV-C radiation as a novel technique for keeping quality
547 of fresh processed Lollo Rosso lettuce. Food Research International, 36(8), 739-756.
- 548 Arabshahi, A., Lund, D.B., 1985. Considerations in calculating kinetic parameters from
549 experimental data. J.Food Process Eng., 7, 239-251.
- 550 Bank, H.L., Schmehl, J.L., Dratch, R.J., 1990. Bacteriocidal effectiveness of modulated
551 UV light. Applied Environ. Microbiol., 56, 3888-3889.
- 552 Barbosa-Cánovas, G. V., Gongora-Nieto, M. M., Pothakamury, U. R., Swanson, B.
553 G., 1999. Fundamentals of high-intensity pulsed electric fields (PEF), In: Preservation of
554 foods with pulsed electric fields, G. V. Barbosa-Cánovas et al. (Eds). Academic Press.
555 San Diego, CA, USA, pp. 1-155.

556 Barbosa-Cánovas, G.V., Rodríguez, J.J., 2002. Update on non-thermal food processing
 557 technologies: Pulsed electric field, high hydrostatic pressure, irradiation and ultrasound.
 558 Food Australia, 54, 513-520.

559 Battista, J. R., 1997. The survival strategies of *Deinococcus radiodurans*. Annu. Rev.
 560 Microbiol. 51, 203-224.

561 Bigelow, W.D., 1921. The logarithmic nature of thermal death time curves. J. Infect. Dis.
 562 34, 528-536.

563 Bintsis, T., Tzanetaki, E. L., Robinson, R. K., 2000. Existing and potential applications of
 564 ultraviolet light in the food industry – A critical review. J. Sci. Food Agric., 80(6), 637-
 565 645.

566 Blasius, M., Sommer, S., Hubscher, U., 2008. *Deinococcus radiodurans*: What belongs
 567 to the survival kit? Crit. Rev. Biochem. Mol. Biol. 43, 221-238.

568 Brewer, M.S., Begum S., Bozeman A., 1995. Microwave and conventional blanching
 569 effects on chemical, sensory, and color characteristics of frozen broccoli. J. Food Qual.
 570 18, 479-493.

571 Britt, A.B., 1996. DNA damage and repair in plants. Annu. Rev. Plant Physiol. Plant
 572 Mol. Biol. 47, 75-100.

573 Canet, W., 1989. Quality and stability of frozen vegetables. In S. Thorne (Ed.).
 574 Developments in Food Preservation, vol.5. Elsevier Science Publishing Inc., New York

575 Corradini, M.G., Normand, M.D., Peleg, M., 2005. Calculating the Efficacy of Heat.
 576 Trends of Food Sci. and Technol. 67, 59-69.

577 Cox, M. M., Battista, J. R., 2005. *Deinococcus radiodurans* - The consummate survivor.
 578 Nat. Rev. Microbiol. 3, 882–892.

579 Cruz, R.M.S., Khmelinskii, I., Vieira, M.C., 2013. Ultrasound applications in food
 580 technology: Equipment, combined processes and effects on safety and quality parameters,

581 In: Sabu Thomas, Visakh, P.M., Laura B. Iturriaga, and Pablo Daniel Ribotta (Eds.)
 582 Advances in Food Science and Nutrition-Volume 2,. Scrivener Publishing,
 583 Massachusetts, USA.
 584 Daly, M.J., Gaidamakova, E.K., Matrosova, V.Y., Vasilenko, A., Zhai, M., Leapman,
 585 R.D., Dunn, J., 2001. Pulsed electric field processing: an overview. In: G. V. Barbosa-
 586 Cánovas, and Q. H. Zhang (Eds.), Pulsed electric fields in food processing: Fundamental
 587 aspects and applications (pp. 1–30). Lancaster, PA: Technomic Publishing Co.
 588 Daly, M.J., Gaidamakova, E.K., Matrosova, V.Y., Vasilenko, A., Zhai, M., Leapman,
 589 R.D., Lai, B., Ravel, B., Li, S.M., Kemner, K.M., Fredrickson, J.K., 2007. Protein
 590 oxidation implicated as the primary determinant of bacterial radioresistance. PLoS Biol.
 591 5(4):e92.
 592 Daly, M.J., 2012. Death by protein damage in irradiated cells. DNA Repair 11, 12-21.
 593 Elmnasser, N., Guillou, S., Leroi, F., Orange, N., Bakhrouf, A., Federighi, M., 2007.
 594 Pulsed light system as a novel food decontamination technology: a review. Can. J.
 595 Microbiol. 53, 813–821.
 596 Fernández, A., Salmerón, C., Fernández, P.S., Martínez, A., 1999. Application of a
 597 frequency distribution model to describe the thermal inactivation of two strains of
 598 *Bacillus cereus*. Trends in Food Sci. and Technol., 10, 158-162.
 599 Gayán, E., Condón, S., Álvarez I., 2014. Biological Aspects in Food Preservation by
 600 Ultraviolet Light: a Review. Food Bioprocess Technol., 7, 1-20.
 601 Gebczynski, P., Kmiecik, W., 2007. Effects of traditional and modified technology, in the
 602 production of frozen cauliflower, on the contents of selected antioxidative compounds
 603 Food Chem, 101, 229-235.
 604 Geeraerd A.H., Valdramidis V.P., Van Impe J.F., 2005. GINAFiT, a freeware tool to
 605 assess non-log-linear microbial survivor curves. Int. J.Food Microbiol. 102, 95-105.

606 Gómez-López, V.M., Devlieghere F., Bonduelle V., Deberere, J. 2005a. Factors affecting
 607 the inactivation of microorganisms by intense light pulses. J. Appl. Microbiol., 2005a;
 608 99:460-470.

609 Goodman, C.L., Fawcett, S., Barringer, S. A., 2002. Flavor, viscosity, and color analyses
 610 of hot and cold break tomato juices. J. Food Sci., 67(1), 404-408.

611 Guerrero-Beltrán, J.A., Barbosa-Cánovas, G.V., 2004. Advantages and limitations on
 612 processing foods by UV light. Food Sci. Technol. Int., 10, 137-147.

613 Hartman, P.A., Deibel, R.H., Sieverding, L.M., 1992. Enterococci. In Compendium of
 614 Methods for the Microbiological Examination of Foods, 3rd edn, Ed by Vanderzant C and
 615 Splittstoesser, D.F., American Public Health Association, Washington, DC, pp 543-531.

616 Hill, C.G., Grieger-Block, R.A., 1980. Kinetic data: generation, interpretation and use.
 617 Food Technol. 34 (2), 56-66.

618 Hoover, D.G., 1997. Minimally processed fruits and vegetables: Reducing microbial load
 619 by nonthermal physical treatments. Journal Appl. Microbiology, 51(6), 66-71.

620 Kitayama, S., Matsuyama A., 1971. Double-strand scissions in DNA of gamma-irradiated
 621 *Micrococcus radiodurans* and their repair during postirradiation incubation. Agric. Biol.
 622 Chem., 35, 644-652.

623 Kleinschmidt, M.G., 1971. Fate of Di-syston (0,0-diethyl S-[2-(ethylthio) ethyl]
 624 phosphorodithioate) in potatoes during processing. J. Agric. Food Chem., 19(6), 1196-
 625 1197.

626 Lasagabaster, A., de Marañón, I.M., 2014. Survival and growth of *Listeria innocua*
 627 treated by pulsed light technology: impact of post-treatment temperature and illumination
 628 conditions. Food Microbiol., 41, 76-81.

629 Lopez-Malo, A., Palou, E., 2005. Ultraviolet light and food preservation. In: Barbosa-
 630 Cánovas, G.V., Tapia, M.S., Cano, M.P. (Eds.), Novel Food Processing Technologies.
 631 CRC Press, Boca Raton, FL, USA, pp. 405-421.
 632 Mafart, P., Couvert, O., Gaillard, S., Leguerinel, I., 2002. On calculating sterility in
 633 thermal preservation methods: application of the Weibull frequency distribution model.
 634 Int. J. Food
 635 Manzocco, L., Pieve, S.D., Maifreni, M., 2011. Impact of UV-C light on safety and
 636 quality of fresh-cut melon. Innov. Food Sci. Emerg. Technol., 12, 13–17.
 637 Marquenie, D., Michiels, C.W., Geeraerd, A.H., Schenk, A., Soontjen, C., Van Impe,
 638 J.F.,
 639 Martens, B., Knorr, D., 1992. Developments of nonthermal processes for food
 640 preservation. Food Technol., 46, 124-133.
 641 Mason, T.J., 1998. Power ultrasound in food processing-The way forward. In: Povey,
 642 M.J.W. and Mason, T.J. (Eds.), Ultrasound in Food Processing, Blackie Academic and
 643 Professional, London, pp. 105-126.
 644 McDonald, K.F., Curry, R.D., Clevenger, T.E., 2000. A comparison of pulsed and
 645 continuous ultraviolet light sources for the decontamination of surfaces. IEEE Trans
 646 Plasma Sci., 28: 1581–1587.
 647 Miller, R., Jeffrey, W., Mitchell, D., Elasri, M., 1999. Bacterial responses to ultraviolet
 648 light. ASM News, 65, 534-541.
 649 Minton, K. W., 1994. DNA repair in the extremely radioresistant bacterium *Deinococcus*
 650 *radiodurans*. Molec. Microbiol., 13, 9-15.
 651 Minton, K. W., 1996. Repair of ionizing-radiation damage in the radiation resistant
 652 bacterium *Deinococcus radiodurans*. Mutation Research, 363, 1-7.

653 Mohamed, J.A., Huang, D.B., 2007. Biofilm formation by enterococci. J. Med.
654 Microbiol., 56, 1581-1588.

655 Morgan, R., 1990. UV “green” light disinfection. Dairy Ind. Int., 54(11), 33-35.

656 Morris, C., Brody, A.L., Wicker, L., 2007. Non-thermal food processing/preservation
657 technologies: a review with packaging implications. Packag. Technol. and Sci., 20(4),
658 275–286.

659 Mosqueda-Melgar, J., Raybaudi-Massilia, R.M., Martín-Belloso, O., 2008a. Combination
660 of high-intensity pulsed electric fields with natural antimicrobials to inactivate pathogenic
661 microorganisms and extend the shelflife of melon and watermelon juice. Food
662 Microbiol., 25 (3), 479-491.

663 Mosqueda-Melgar, J., Raybaudi-Massilia, R.M., Martín-Belloso, O., 2008b. Inactivation
664 of *Salmonella enterica* Ser. Enteritidis in tomato juice by combining of high-intensity
665 pulsed electric fields with natural antimicrobials. J. Food Sci., 73 (2).

666 Mosqueda-Melgar, J., Raybaudi-Massilia, R. M., Martín-Belloso, O., 2008c. Nonthermal
667 pasteurization of fruit juices by combining high-intensity pulsed electric fields with
668 natural antimicrobials. Innov. Food Sci. and Emerg. Technol. 9(3):328-340.

669 Neves, F.I.G., Vieira, M.C. and Silva, C.L.M., 2012. Inactivation kinetics of peroxidase
670 in zucchini (*Cucurbita pepo* L.) by heat and UV-C radiation. Innov. Food Sci. Emerg.
671 Technol. 13, 158-162.

672 Neves, F.I.G., Vieira, M.M.C., Silva, C.L.M., 2014. Effects of UV Pre-Treatments on
673 Frozen Vegetables Quality In: Radosevich, J.A. (Ed.) UV Radiation: Properties, Effects
674 and Applications, Nova Science Publishers, USA, pp. 13-36.

675 Nicolăi, B.M., 2002. Using survival analysis to investigate the effect of UVC and heat
676 treatment on storage rot of strawberry and sweet cherry. Int. J. Food Microbiol., 73(3),
677 187-196.

678 Peleg, M., Cole, M.B., 1998. Reinterpretation of microbial survival curves. Crit. Rev.
679 Food Sci. 38, 353–380.

680 Peleg, M., 1999. On calculating sterility in thermal and non-thermal preservation
681 methods. Food Res. Int. 32, 271–278.

682 Peleg, M., Cole, M.B., 2000. Estimating the survival of *Clostridium botulinum* spores
683 during heat treatments. J. Food Prot. 63, 190– 195.

684 Peleg, M., 2002. A model of survival curves having an activation shoulder. J. Food. Sci.,
685 67, 2438-2443.

686 Peleg, M. 2003a. Interpretation, mathematical modelling and utilisation, Comments
687 Theor. Biol., 8, 357-387.

688 Perez, B.S., Lorenzo, P. L., Garcia, M.L., Hernandez, P.E., Ordonez, J.A., 1982. Heat
689 resistance of enterococci. Milchwissenschaft, 37, 724-6.

690 Préstamo, G., Fuster, C., Risueno, M.C., 1998. Effects of blanching and freezing on the
691 structure of carrots cells and their implications for food processing. J. Sci. Food Agric.,
692 77(2), 223-229.

693 Purich, D., Allison R.D., 2000. Handbook of Biochemical Kinetics. Academic Press, San
694 Diego.

695 Ray, B., 1996. Fundamental Food Microbiology, CRC Press, Boca Raton, FL, pp 41-50,
696 363-364.

697 Repar, J., Cvjetan, S., Slade, D., Radman, M., Zahradka, D., Zahradka, K., 2010. A
698 protein assures fidelity of DNA repair and genome stability in *Deinococcus radiodurans*.
699 DNA Repair, 9, 1151-1161.

700 Scalzo, J., Politi, A., Pellegrini, N., Mezzetti, B., Battino, M., 2005. Plant genotype
 701 affects total antioxidant capacity and phenolic contents in fruit. *Nutrition*, 21, 207-213.

702 Señorans, F.J., Ibáñez, E., and Cifuentes, A., 2003. New trends in food processing. *Crit.*
 703 *Rev. Food Sci. Nutr.*, 43, 507–526.

704 Shams, M.A., Thompson, D.R., 1987. Qualitative determination of pea losses as affected
 705 by conventional water blanching. *J. Food Sci.*, 52(4), 1006-1009.

706 Shukla, T.P., 1992. Microwave ultrasonics in food processing. *C.F.W.*, 37, 332-333,

707 Slade, D., Radman, M., 2011. Oxidative stress resistance in *Deinococcus radiodurans*.
 708 *Microbiol. Mol. Biol., Rev.* 75, 133-191.

709 Stata Corporation, 2007. Stata statistical software: Release 10.0 college station.

710 Steels, E. L., Learmonth, R. P., 1994. Stress tolerance and membrane lipid unsaturation in
 711 *Saccharomyces cerevisiae* grown aerobically and anaerobic ally. *Microbiol.*, 140, 569-74.

712 Suslick, K.S., 1988. Homogeneous sonochemistry. In Suslick, K.S., (Ed.), *Ultrasound: Its*
 713 *Chemical, Physical, and Biological Effects*, pp. 123–163. VCH Publishers, New York.

714 Temiz, A., 1998. Indicator microorganisms in foods. In *Food Microbiology*, Ed. Ünlütürk
 715 A. and Turantas F., Mengi Tan Press, İzmir, pp 85-108.

716 Tuteja, N., Singh, M.B., Misra, M.K., Bhalla, P.L., Tuteja, R., 2001. Molecular
 717 mechanisms of DNA damage and repair: progress in plants. *Crit. Rev. Biochem. Mol.*
 718 *Biol.*, 36, 337-397.

719 Tuteja, N., Tuteja, R., 2001. Unraveling DNA repair in human: molecular mechanisms
 720 and consequences of repair defect, *Crit. Rev. Biochem. Mol. Biol.*, 36, 261–290.

721 Wang, T., MacGregor, S.J., Anderson J.G., 2005. Pulsed ultra-violet inactivation
 722 spectrum of *Escherichia coli*. *Water Res*, 39, 2921-2925.

723 White, H.R., 1953. The heat resistance of *Streptococcus faecalis*. *J. General Microbiol.*,
 724 8, 27-37.

Wu, J.R., 2002. Theoretical study on shear stress generated by microstreaming
surrounding contrast agents attached to living cells. Ultrasound Med. Biol., 28, 125-129.

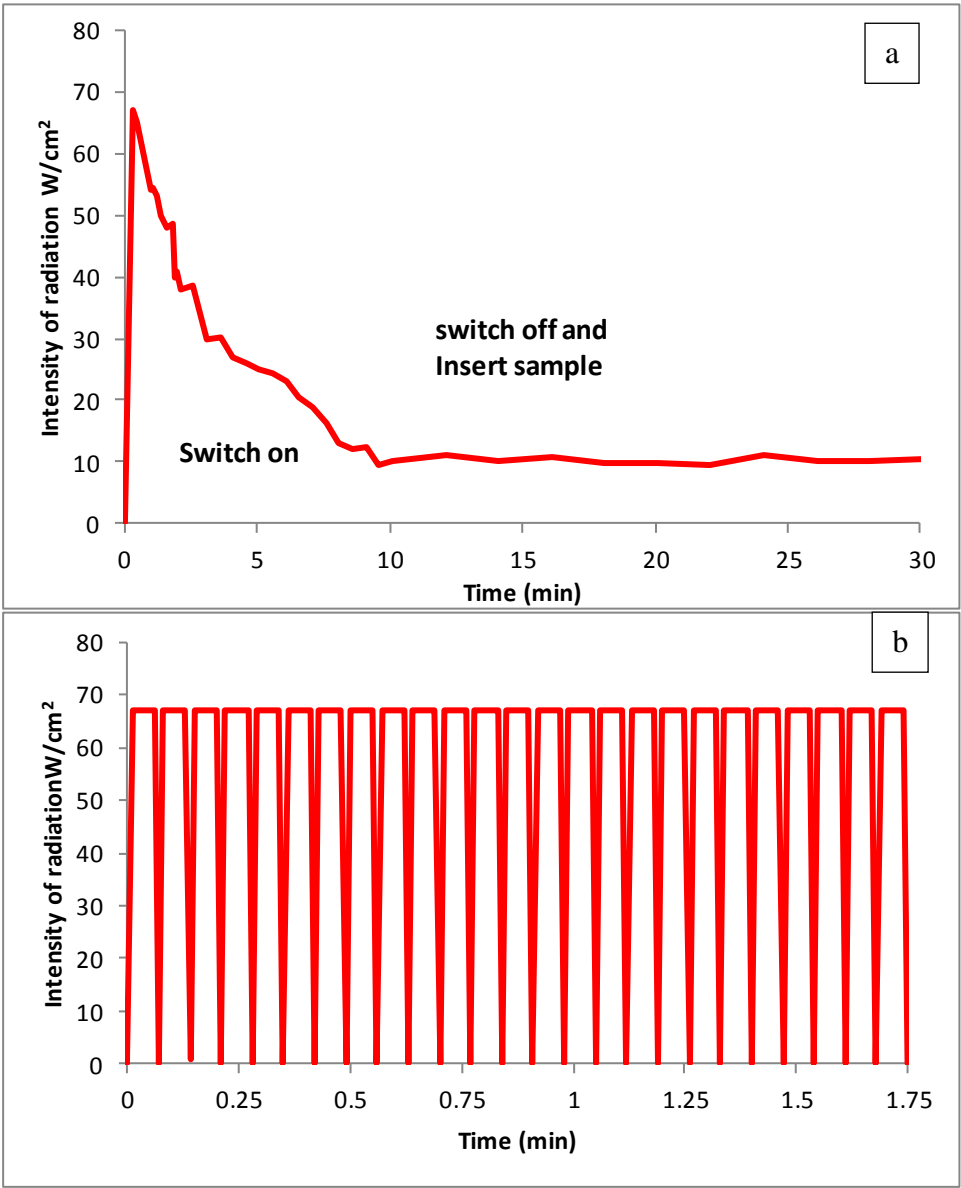


Fig. 1


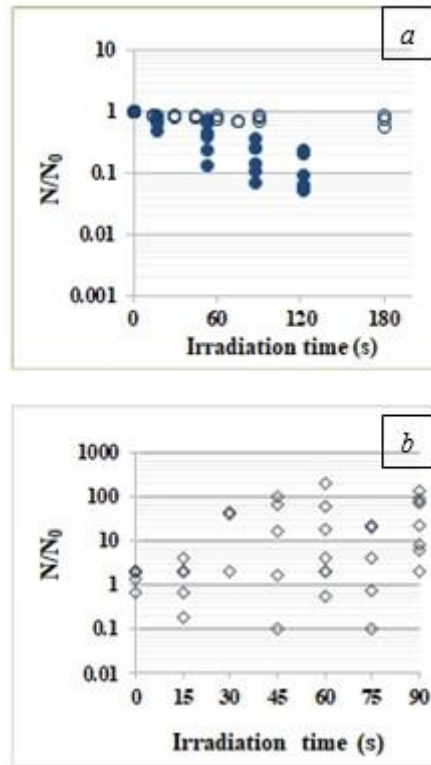


Fig. 2

737

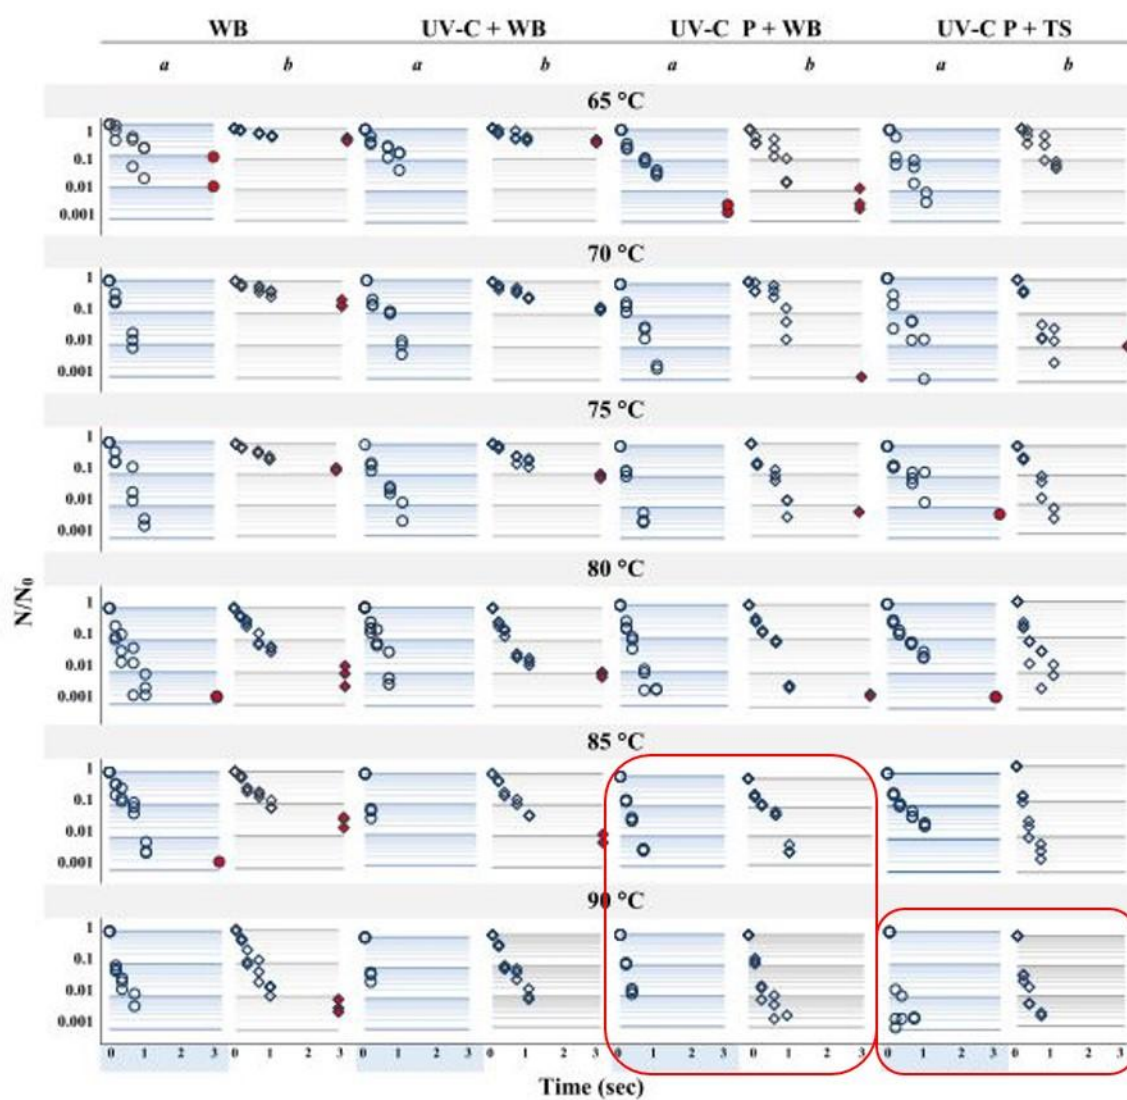

738

739

740

741


742

743

744 **Fig. 3**

745

746

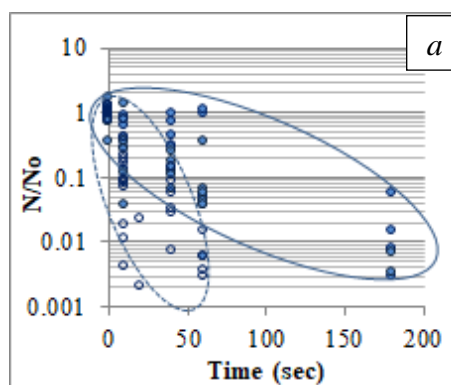

747

748

749

750

751

752

753

754

755


756

757

758

759

760 **Fig. 4**

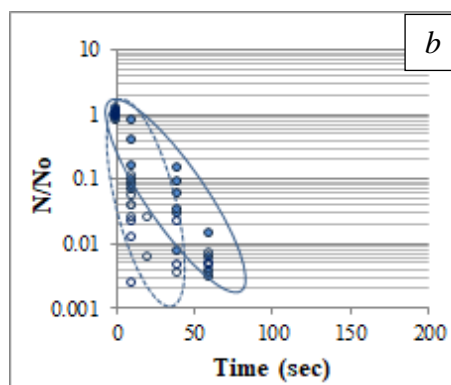


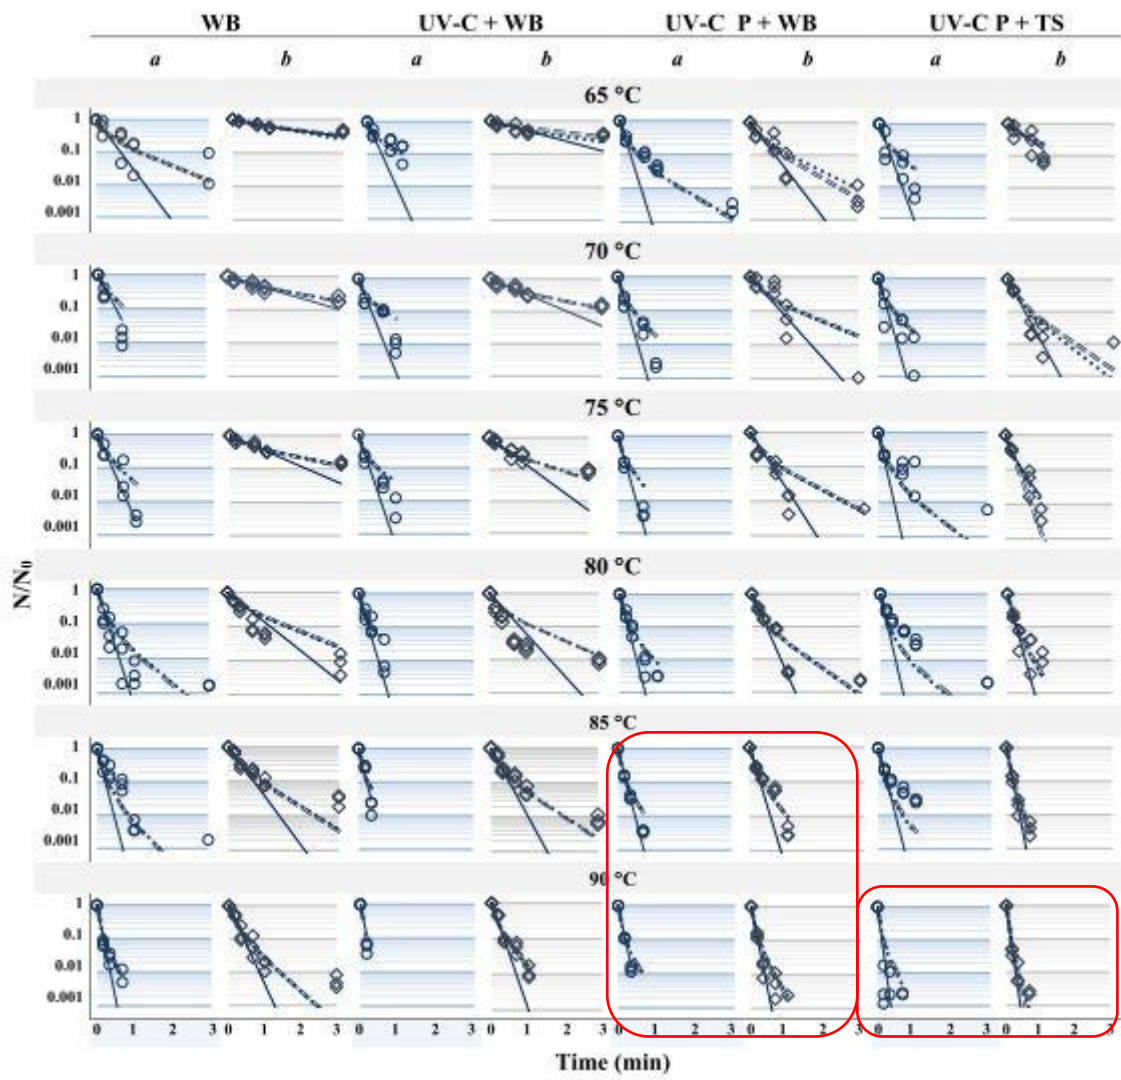


Fig. 5

764

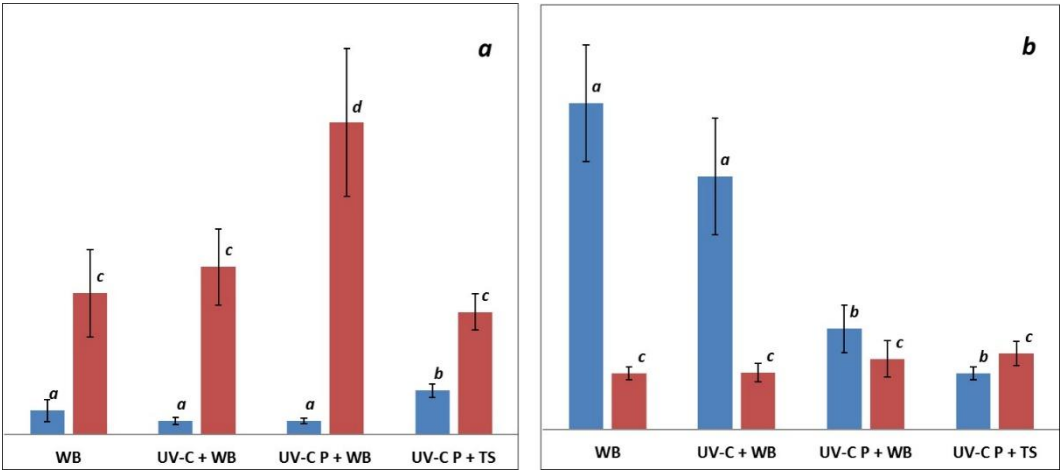

765

766

767

768

769

770

771

772

773

774

775

776

777

778

779

780

Fig. 6

Table 1 – Models used to explain better the experimental data and kinetic parameters

Model	Equation	References
Bigelow	$\frac{N}{N_0} = 10^{\left(-\frac{t}{D(T_{ref})10^{\left(\frac{T-T_{ref}}{z} \right)}} \right)} \quad (9)$	Bigelow, 1921
Weibull-Peleg	$\frac{N}{N_0} = \exp \left(-\ln \{ 1 + \exp [k_0 (T - T_c)] \} t^p \right) \quad (10)$	Corradini et al., 2005; Fernández et al., 1999; Peleg, 1999; Peleg and Cole, 1998, 2000 ; Weibull, 1951
Weibull-Mafart	$\frac{N}{N_0} = 10^{\left(-\frac{t}{\hat{D}(T_{ref})10^{\left(\frac{T-T_{ref}}{z} \right)}} \right)^p} \quad (11)$	Mafart, 2005 ; Purich and Allison, 2000

808
809
810
811
812

Table 2 – Overview of Bigelow model kinetic parameters estimated on zucchini surface (*Cucurbita pepo* L.) inoculated with *Enterococcus faecalis* and *Deinococcus radiodurans*.

	<i>Enterococcus faecalis</i>				<i>Deinococcus radiodurans</i>			
	$D_{77,5} \cdot C$ (s)	z (K)	R^2	$R^2_{adj.}$	$D_{77,5} \cdot C$ (s)	z (K)	R^2	$R^2_{adj.}$
WB	21±1	44.2±7.5	0.96	0.95	87±4	23±1	0.98	0.98
UV-C + WB	17±1	70.37±12.4	0.98	0.98	63±3	25±2	0.96	0.96
UV-C P + WB	14.0±0.4	146±33	0.99	0.99	29±2	31±4	0.94	0.94
UV-C P TS	15±1	158±74	0.97	0.97	18±1	35±3	0.99	0.99

813
814
815
816
817
818
819
820
821

Table 3 – Overview of Weibull-Peleg model kinetic parameters estimated on zucchini surface (*Cucurbita pepo* L.) inoculated with *Enterococcus faecalis* and *Deinococcus radiodurans*.

	<i>Enterococcus faecalis</i>					<i>Deinococcus radiodurans</i>				
	k_o (s ⁻¹)	Tc (K)	p	R^2	$R^2_{adj.}$	k_o (s ⁻¹)	Tc (K)	p	R^2	$R^2_{adj.}$
WB	0.047±0.007	396±8	0.665±0.079	0.96	0.96	0.080±0.005	394.±2	0.73±0.05	0.98	0.98
UV-C + WB	0.041±0.005	388±5	0.512±0.046	0.99	0.98	0.072±0.006	392±3	0.66±0.06	0.97	0.97
UV-C P + WB	0.032±0.009	398±14	0.446±0.072	0.98	0.98	0.059±0.008	390±5	0.66±0.08	0.95	0.95
UV-C P + TS	0.02±0.003	420±10	0.716±0.056	0.99	0.99	0.059±.004	386±3	0.70±0.05	0.99	0.99

829

830 **Table 4** – Overview of a modified version of Weibull-Mafart model kinetic parameters estimated on zucchini surface (*Cucurbita pepo* L.)831 inoculated with *Enterococcus faecalis* and *Deinococcus radiodurans*.

	<i>Enterococcus faecalis</i>					<i>Deinococcus radiodurans</i>				
	$\delta_{77.5} \cdot C$ (s)	z (K)	p	R^2	$R^2_{adj.}$	$\delta_{77.5} \cdot C$ (s)	z (K)	p	R^2	$R^2_{adj.}$
WB	9±2	53±8	0.67±0.08	0.97	0.96	123±11	21±1	0.73±0.05	0.98	0.98
UV-C + WB	5.1±0.7	62 ±7	0.51±0.05	0.99	0.98	95±11	22±2	0.66±0.06	0.97	0.97
UV-C P + WB	5.0±0.5	116±14	0.57±0.04	0.99	0.99	38±4	27±3	0.66±0.08	0.95	0.95
UV-C P TS	16±1	45 ±7	0.57±0.06	0.99	0.99	21±1	29±2	0.70±0.05	0.99	0.99

Fig. 1 – UV-C radiation time profile emitted on the prototype of equipment: a) emitted in continuous; b) emitted by pulses.

Fig. 2 - Effect of UV-C radiation emitted in continuous (11 W/cm²) (○) and in pulses (67.5 W/cm²) (●) on *Enterococcus faecalis* reduction, and emitted in continuous (11 W/cm²) (◇) on *Deinococcus radiodurans* reduction, both previously inoculated, one at a time, on zucchini surface.

Fig. 3 - Survival standardized data of *E. faecalis* and *D. radiodurans* previously inoculated one at a time, on zucchini through the application of blanching (B) alone, combined with ultraviolet radiation emitted in continuous (UV-C + B), by pulses (UV-C P + B) or thermosonication combined with UV-C pulses (UV-C P + TH). For *E. faecalis*, experimental data of survival cells (○), *D. radiodurans* experimental data of survival cells (◇). Symbols in red represent resistant cells. The best pre-treatment combinations conditions are enhanced by a red rectangle.

Fig. 4 - Effect of the sequence Blanching + UV-C Pulses (●) or UV-C Pulses + Blanching (○) on *Enterococcus faecalis* reduction on zucchini surface at 60 °C (a) and 90 °C (b).

Fig. 5 - Kinetic effect of all the pre-treatments on microbial reduction of *E. faecalis* and *D. radiodurans* previously inoculated one at a time, on zucchini through the application of blanching (WB) alone, combined with ultraviolet radiation emitted in continuous (UV-C + B), by pulses (UV-C P + WB) or thermosonication combined with UV-C pulses (UV-C P + TH). For *E. faecalis*, experimental data of survival cells (○), *D. radiodurans* experimental data of survival cells (◇). Experimental data fitted to Bigelow model (—), Weibull-Peleg model (●●●) and modified Weibull-Mafart model (=). The best pre-treatment combinations conditions are enhanced by a red rectangle.

856 **Fig. 6** - Graphical compilation of δ (■) and z (■) values obtained by the Weibull-Mafart
857 model for the treatments under study: a) *Enterococcus faecalis*; b) *Deinococcus*
858 *radiodurans*. The bars represent standard deviations of results. Values with different
859 letters differ significantly ($p < 0.05$).

Figure 1
[Click here to download high resolution image](#)

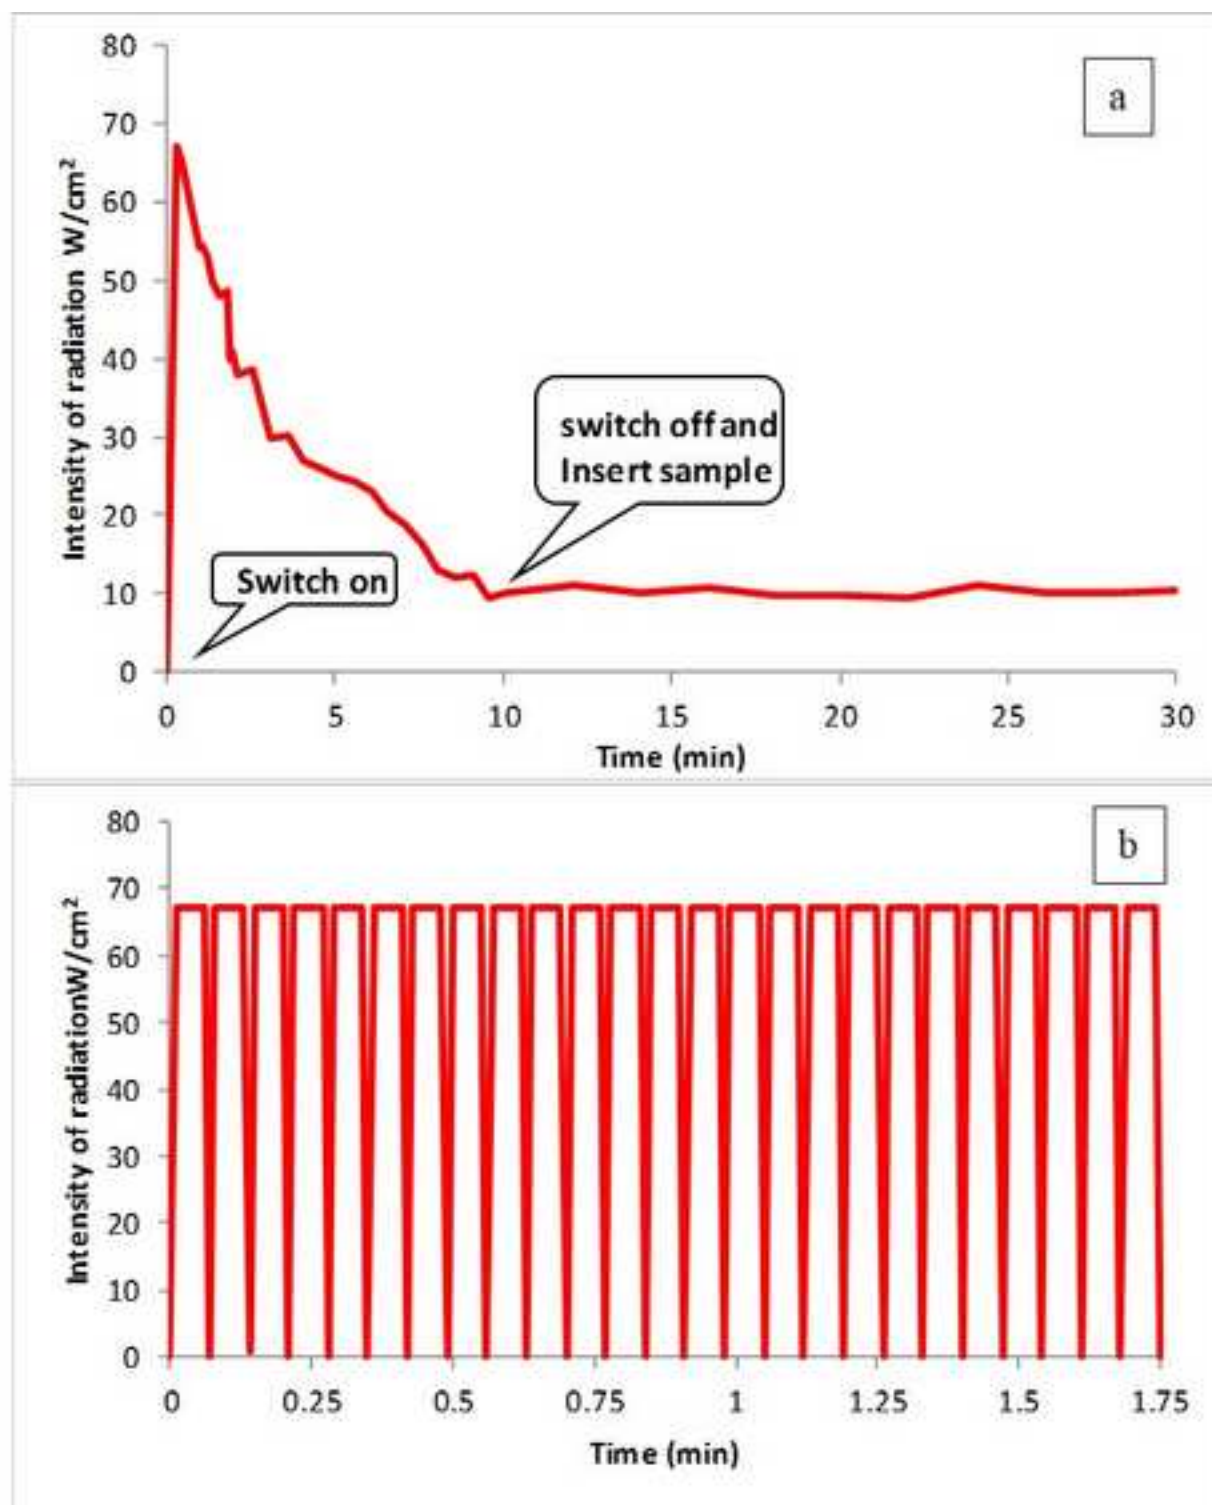


Figure 2

[Click here to download high resolution image](#)

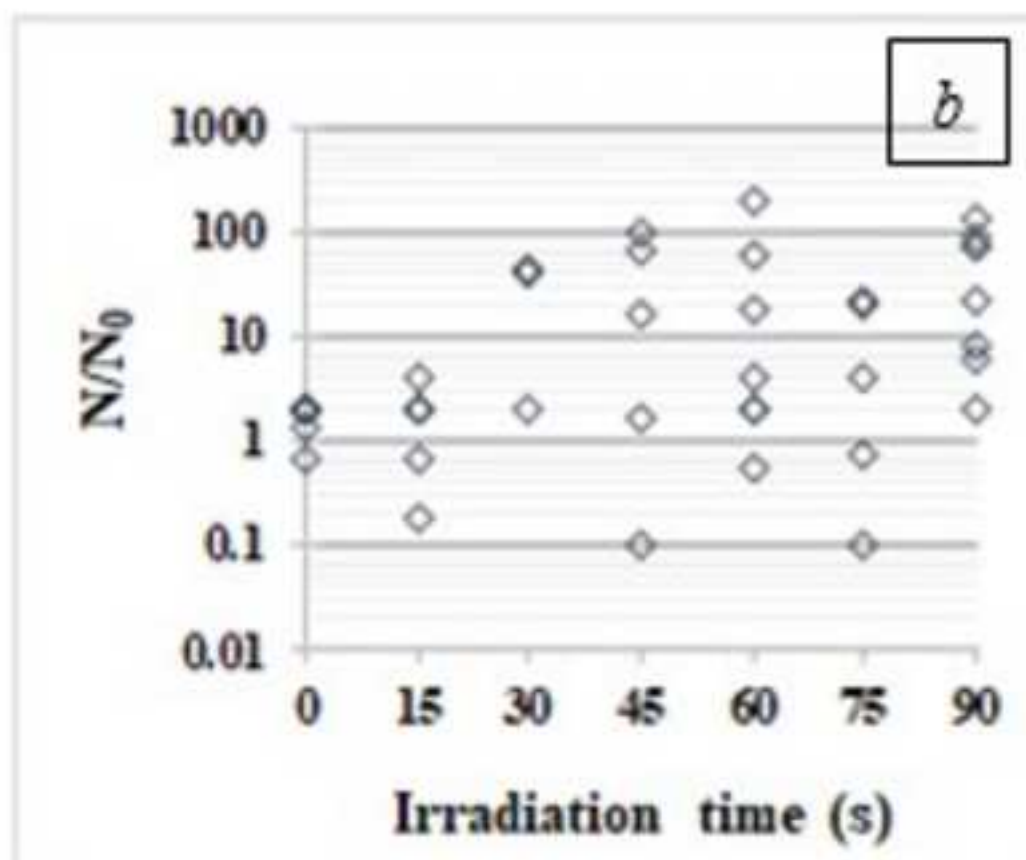
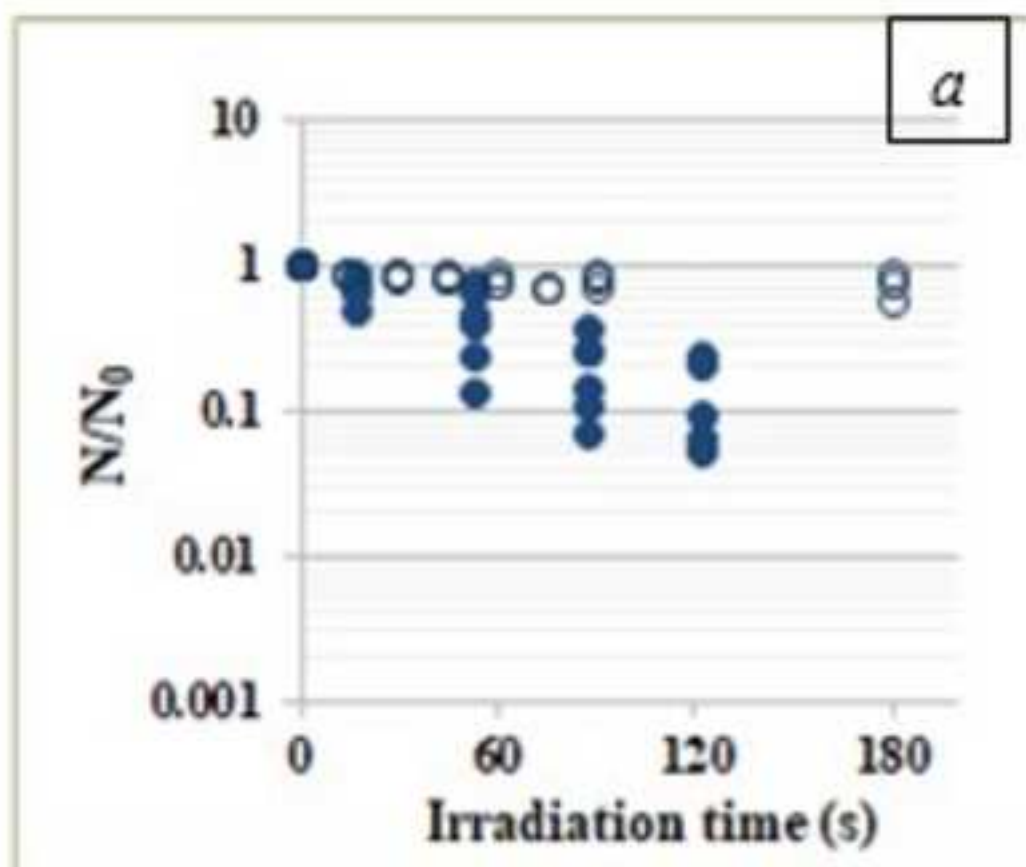


Figure 3
[Click here to download high resolution image](#)

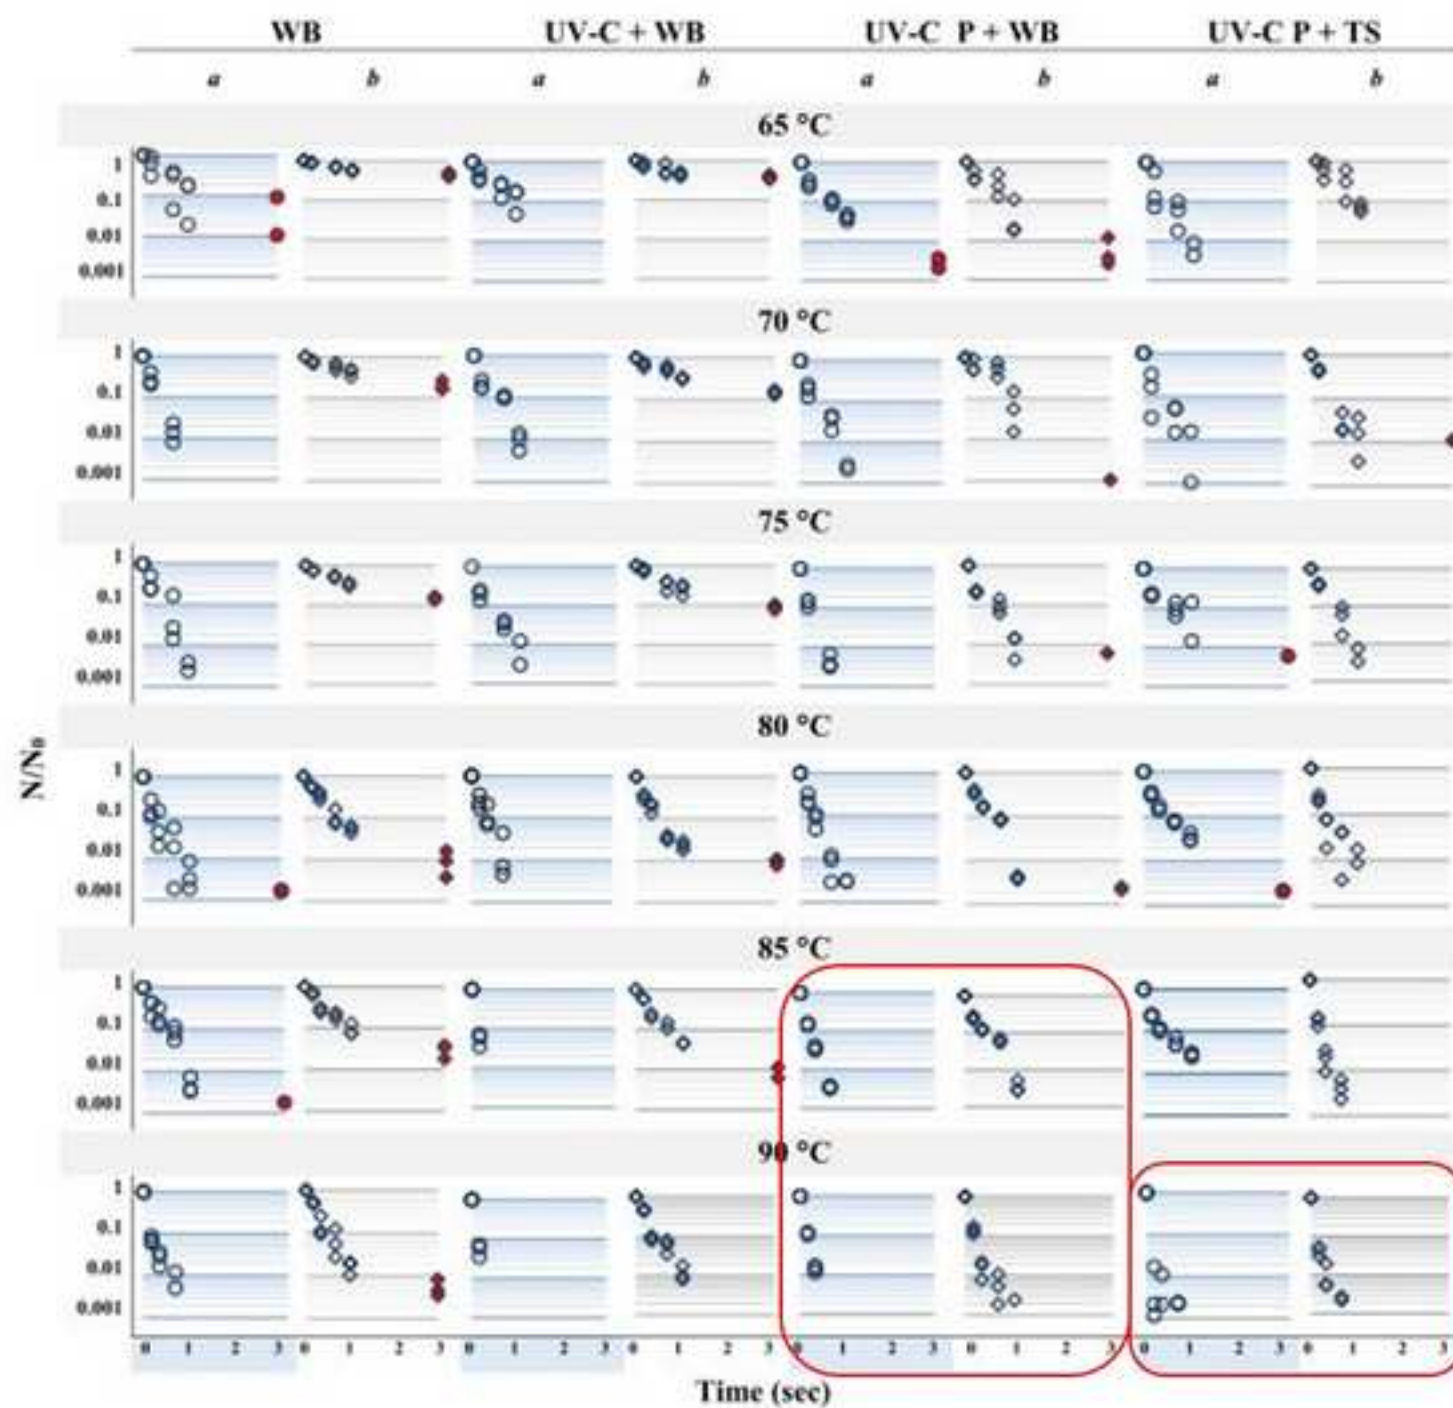


Figure 4
[Click here to download high resolution image](#)

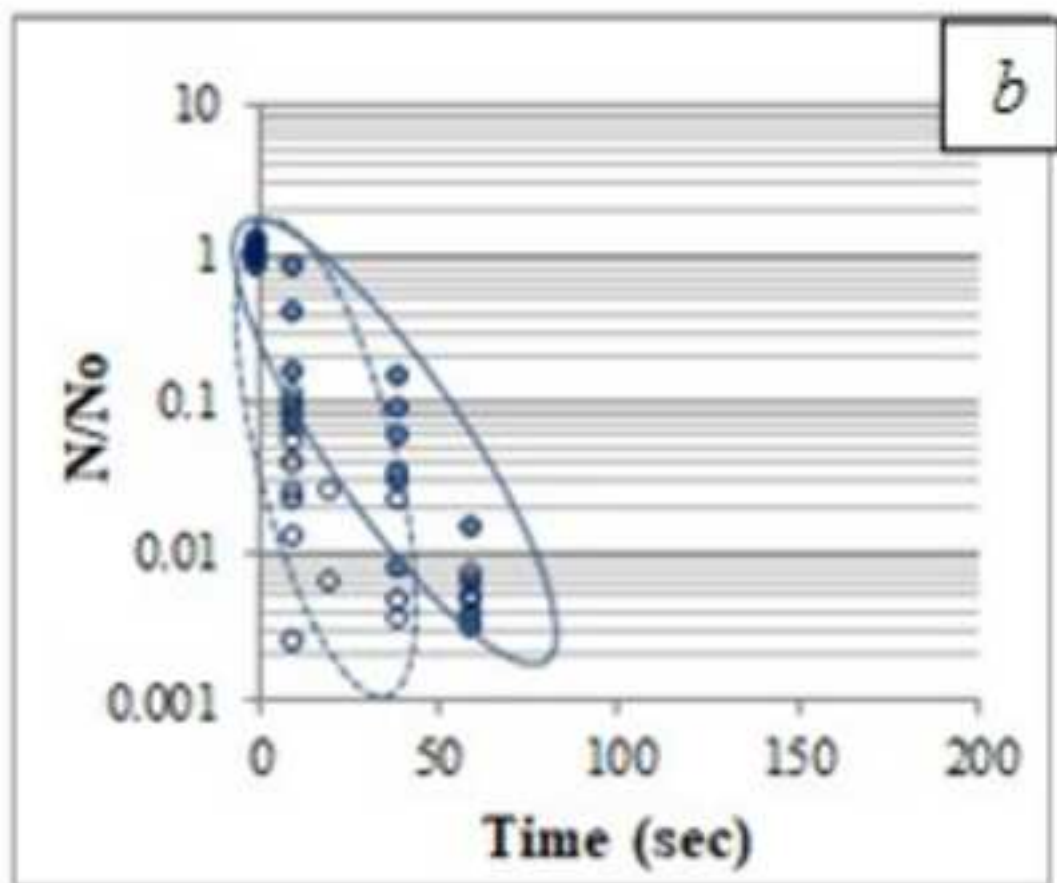
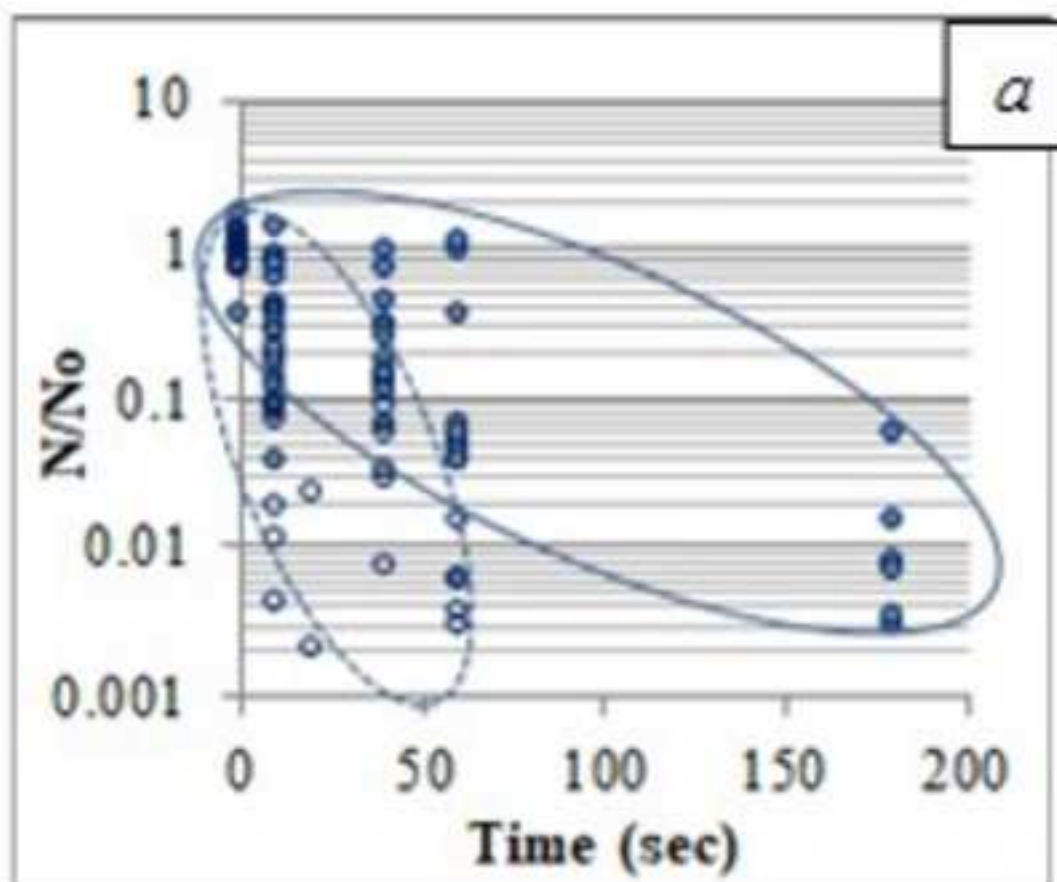


Figure 5
[Click here to download high resolution image](#)

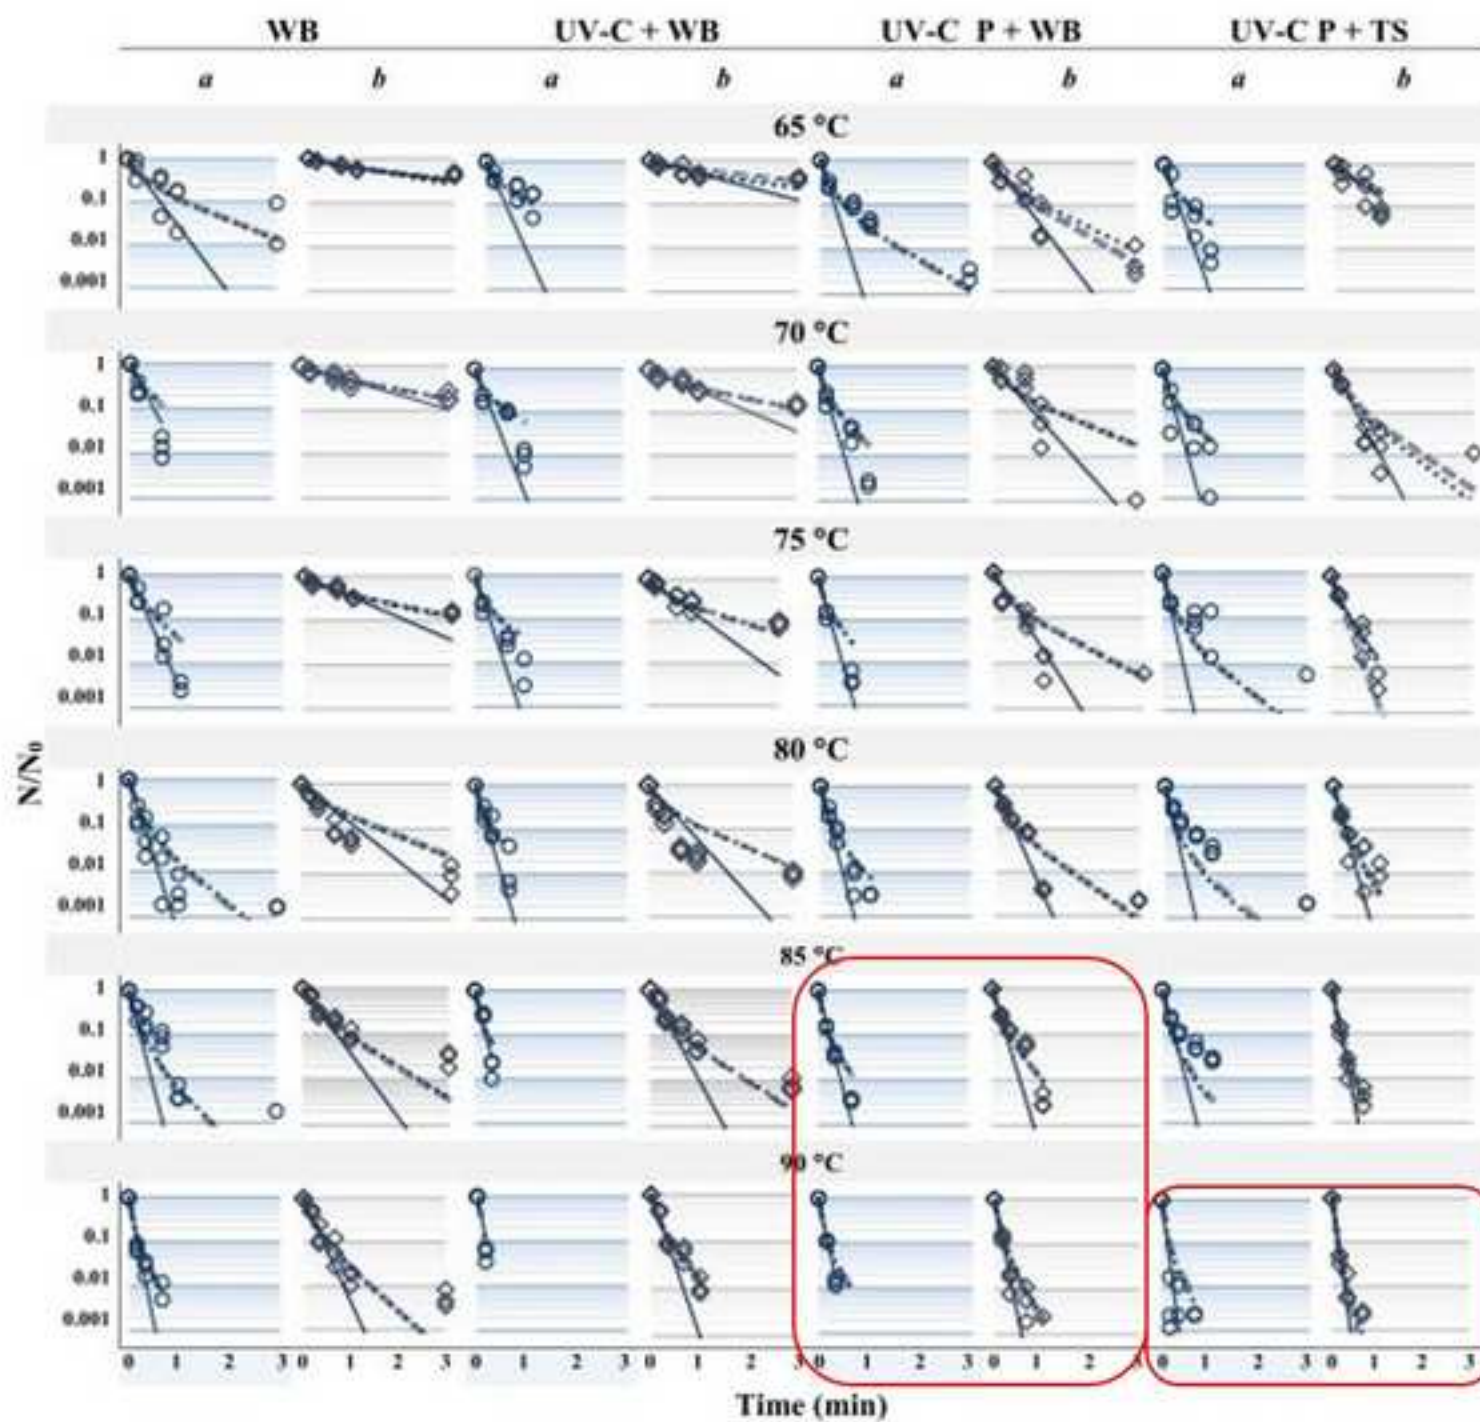


Figure 6
[Click here to download high resolution image](#)

