

Microalgae allow reducing aeration requirements and improve the efficiency of granular sludge treating coastal aquaculture streams aimed at recirculation

Ana S. Oliveira¹, Paula M. L. Castro¹, Catarina L. Amorim¹



CATOLICA
FACULTY
OF BIOTECHNOLOGY

PORTO

¹ Universidade Católica Portuguesa, CBQF - Centro de Biotecnologia e Química Fina – Laboratório Associado, Escola Superior de Biotecnologia, Rua Diogo Botelho 1327, 4169-005, Porto, Portugal

Introduction

In recent decades, water pollution has become a global issue of increasing environmental concern. In the journey towards the energy and carbon neutrality of wastewater treatment processes, an increasing interest has been placed in microalgal-bacterial granular sludge (MBGS) systems. The combination of both microorganisms within the same granular structure can have several benefits: (i) higher process efficiency due to a more diverse metabolic machinery; (ii) higher sustainability since microalgae can assimilate CO₂ and nutrients to generate O₂, which is in turn used by bacteria for organics oxidation to produce CO₂; (iii) less oxygen supply is needed to treat wastewater [1,2]. This study investigated the performance of a microalgal-bacterial granular sludge (MBGS) process to treat coastal aquaculture wastewater at different aeration levels to ascertain on the minimum dissolved oxygen content needed to efficiently remove pollutants and allow water recycling in aquaculture facilities.

Methods

MBGS photo-sequencing reactor operation

- Reactor set-up according to previous work [3]
- Quantification of NH₄⁺-N, NO₂⁻-N, NO₃⁻-N in the wastewater and reactor effluent
- Airflow rate during the aeration period decreased throughout operation:

Phase	Operational days	Airflow rate (L min ⁻¹)
I	day-0 to -79	3.0
II	day-80 to -106	2.5
III	day-107 to -120	2.0
IV	day-121 to -134	1.5
V	day-135 to -141	1.0



Results

MBGS removal performance

Phase	Concentration (mg L ⁻¹)					
	NH ₄ ⁺ -N		NO ₂ ⁻ -N		NO ₃ ⁻ -N	
	WW	Effluent ^a	WW	Effluent ^a	WW	Effluent ^a
I		0.02 ± 0.03		1.09 ± 0.71		2.15 ± 1.45
III		0.00 ± 0.00		2.33 ± 0.38		2.17 ± 0.59
III	0.30	0.00 ± 0.00	0.25	2.65 ± 0.35	8.0	2.10 ± 0.00
IV		0.00 ± 0.00		1.50 ± 0.71		1.15 ± 0.07
V		0.00 ± 0.00		0.35 ± 0.00		0.70 ± 0.00

^a Mean ± standard deviation

Ammonium

- Complete removal shortly after beginning of operation
- The decrease of the airflow did not impair its oxidation

Nitrite

- Nitrite was not removed and thus released in the effluent
- Lower airflow rates led to lower nitrite levels in the effluent

Nitrate

- Removal fluctuated during phases I-III
- Lower airflow during phases IV-V improved nitrate removal



Lower airflow rates provide sufficient O₂ for:

- ✓ Ammonium oxidation
- ✓ Nitrite and nitrate removal, possibly through denitrification.

Treated water chemical quality and recirculation

- Water quality is determinant for the success of aquaculture production
- NH₄⁺, NO₂⁻ and NO₃⁻ in the treated effluent were below fish toxicity limits
- The dissolved O₂ and pH values were within the ideal values for reuse
- High-chemical quality treated effluent for water recirculation within a coastal aquaculture farm

	Reactor effluent (phase IV)	Brackishwater and marine fish toxicity limits or ideal ranges	Reference
NH ₄ ⁺ -N (mg L ⁻¹)	0	< 0.3-0.6 ^{a, b}	[4]
NO ₂ ⁻ -N (mg L ⁻¹)	< 2.0	< 38.0 ^a	[5]
NO ₃ ⁻ -N (mg L ⁻¹)	< 1.2	< 10.0 ^a	[6]
DO (mg L ⁻¹) ^c	> 5.7	> 5.0	[7]
pH	8.59-8.64	6.5 – 9.0	[8]

^a LC₅₀ values


^b NH₃-N toxicity limit

^c DO - Dissolved oxygen

Aeration requirements


Phase IV

Airflow rate of 1.5 L min⁻¹ provides sufficient O₂ to achieve high removal performance and prevent the outgrowth of filamentous organisms

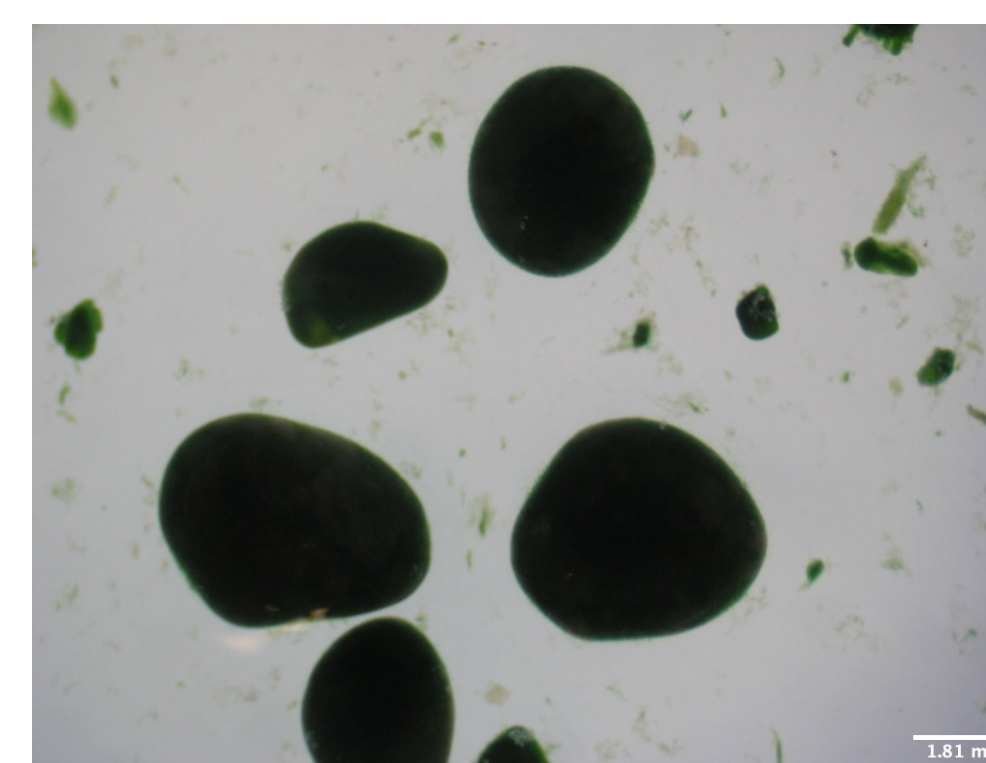

Phase V

Airflow rate of 1.0 L min⁻¹ led to the proliferation of filamentous microorganisms that colonized the granules' surface

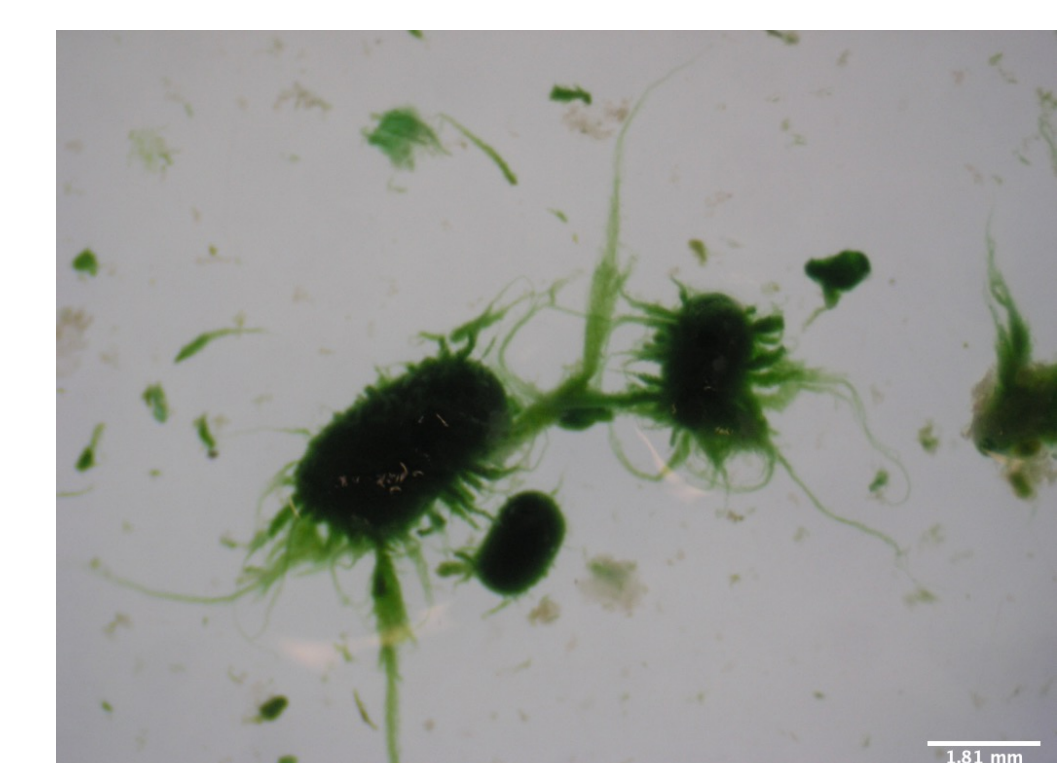

Conclusions

- The chemical quality of the treated effluents complied with the marine fish toxicity limits for water recirculation
- An extremely low airflow rate of 1.5 L min⁻¹ ensured the process removal efficiency and granules' integrity, which represents economic savings for the aquaculture
- Further research and life cycle assessment needs to be conducted to confirm lower operational costs and energy savings of this treatment system
- MBGS is promising as a recirculating aquaculture systems, decreasing the water needs and dependence of land-based aquacultures

Acknowledgements

This work was financed by Norte 2020 through Project 3BOOST (POCI-01-0246-FEDER-181302). Authors thank the CBQF scientific collaboration under the FCT project UIDB/50016/2020.



References

- Guo et al. 2021. *Environ Sci and Pollut Res.* 10.1007/s11356-020-11565-7
- Ji et al. 2020. *Water Res.* 10.1016/j.watres.2020.115884
- Oliveira et al. 2023. *Water Res.* 10.1016/j.watres.2023.119733
- Franklin and Edward. 2019. *Indian J Geo-Mar Sci.* 48, 273–279.
- Costa et al. 2008. *Aquaculture.* 10.1016/j.aquaculture.2008.08.017
- Camargo et al. 2005. *Chemosphere.* 10.1016/j.chemosphere.2004.10.044
- Bozorg-Haddad et al. 2021. *Water quality, hygiene, and health, in: Economical, Political, and Social Issues in Water Resources.* Elsevier Inc., pp. 217–256.
- Makori et al. 2017. *Fish Aquatic Sci.* 10.1186/s41240-017-0075-7